

Please type a plus sign (+) inside this box



Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

PTO/SB/05 (08-00)
Approved for use through 10/31/2002 OMB 0651-0032
U.S. Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

003115.P002XD2

First Inventor

Kim Y. Kao

Title

METHOD AND APPARATUS FOR SELECTING, MONITORING, AND

Express Mail Label No.

EL466330533US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents

ADDRESS TO

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)

2. ☒ Applicant claims small entity status.
See 37 CFR 1.27.

3. ☒ Specification [Total Pages 33]
(preferred arrangement set forth below)
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to sequence listing, a table,
or a computer program listing appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

4. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 14]

5. Oath or Declaration [Total Pages 3]
a. ☐ Newly executed (original or copy)
b. ☒ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 17 completed)

☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b)

6. ☐ Application Data Sheet. See 37 CFR 1.76

7. ☐ CD-ROM or CD-R in duplicate, large table or
Computer Program (Appendix)

8. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- a. ☐ Computer Readable Form (CRF)
b. Specification Sequence Listing on:
i. ☐ CD-ROM or CD-R (2 copies); or
ii. ☐ paper
c. ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))
10. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
13. ☒ Preliminary Amendment
14. ☐ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☒ Other: Copy of Small Entity Declaration filed in parent application

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:


☐ Continuation ☒ Divisional ☐ Continuation-in-part (CIP) of prior application No: 09/088,213

Prior application Information: Examiner K. Schuster Group/Art Unit: 2182

For CONTINUATION OR DIVISIONAL APPS only. The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts

18. CORRESPONDENCE ADDRESS

☒ Customer Number of Bar Code Label



08791

PATENT TRADEMARK OFFICE

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

Name

Address

City

State

Zip Code

Country

Telephone

Fax

Name (Print/Type)

William W. Schaal

Registration No. (Attorney/Agent)

39,018

Signature

Date 11/07/00

Burden Hour Statement: This form is estimated to take 2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

FEE TRANSMITTAL for FY 2000

Patent fees are subject to annual revision

TOTAL AMOUNT OF PAYMENT (\$)

373.00

Complete if Known

Application Number
Filing Date November 7, 2000
First Named Inventor Kim Y. Kao
Examiner Name K. Schuster
Group/Art Unit 2182
Attorney Docket No. 003115.P002XD2

948 U.S. PRO
09/707647
11/07/00

METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to

Deposit
Account
Number

02-2666

Deposit
Account
Name

Blakely, Sokoloff, Taylor & Zafman LLP

- ☒ Charge Any Additional Fee(s) Required
Under 37 CFR §§ 1.16, 1.17, 1.18 and 1.20

- ☒ Applicant claims small entity status
See 37 CFR 1.27

2. ☒ Payment Enclosed:

☒ Check ☐ Credit card ☐ Money
Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
101	710	201	355	Utility filing fee	355.00
106	320	206	160	Design filing fee	
107	490	207	245	Plant filing fee	
108	710	208	355	Reissue filing fee	
114	150	214	75	Provisional filing fee	
SUBTOTAL (1)					355.00

2. EXTRA CLAIM FEES

Total Claims		Extra Claims		Fee from below	
Independent	21	20**	1	9.00	\$9.00
Claims	3	3**	0	40.00	
Multiple Dependent					

**or number previously paid, if greater, For Reissues, see below

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
103	18	203	9	Claims in excess of 20	
102	80	202	40	Independent claims in excess of 3	
104	130	204	135	Multiple Dependent claim, if not paid	
109	80	209	40	**Reissue independent claims over original patent	
110	18	210	9	**Reissue claims in excess of 20 and over original patent	
SUBTOTAL (2)					18.00

FEE CALCULATION (continued)

3. ADDITIONAL FEE

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet.	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for response within first month	
116	390	216	195	Extension for response within second month	
117	890	217	445	Extension for response within third month	
118	1,390	218	695	Extension for response within fourth month	
128	1,890	228	945	Extension for response within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,240	241	620	Petition to revive - unintentional	
142	1,240	242	620	Utility issue fee (or reissue)	
143	440	243	220	Design issue fee	
144	600	244	300	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	
146	710	246	355	Filing a submission after final rejection (37 CFR § 1.129(a))	
149	710	249	355	For each additional invention to be examined (37 CFR § 1.129(b))	
179	710	126	355	Request for Continued Examination (RCE)	
169	900	169	900	Request for expedited examination of a design application	
Other fee (specify)					
Other fee (specify)					
*Reduced by Basic Filing Fee Paid					
SUBTOTAL (3)					

SUBMITTED BY

Name (Print/Type) William W. Schaal

Registration No.
(Attorney/Agent)

39,018

Telephone

(714) 557-3800

Signature

Date

11/07/00

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2039.

Burden Hour Statement This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

**STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(b)) -- INDEPENDENT INVENTOR**

Docket Number (Optional)
003115.P002X

Applicant, Patentee, or Identifier: Kim Y. Kao
Application or Patent No.: 09/088,213
Filed or Issued: May 29, 1998
Title: METHOD AND APPARATUS FOR SELECTING, MONITORING, AND CONTROLLING
ELECTRICALLY POWERED DEVICES

As a below named inventor, I hereby state that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

- ☐ the specification filed herewith, with title as listed above.
☒ the application identified above.
☐ the patent identified above.

I have not assigned, granted, conveyed, or licensed, and am under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ No such person, concern, or organization exists.
☐ Each such person, concern or organization is listed below.*

Separate statements are required from each named person, concern, or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

Kim Y. Kao
NAME OF INVENTOR

[Signature]
Signature of Inventor

10/24/00
DATE

Kent Kwan
NAME OF INVENTOR

[Signature]
Signature of Inventor

10/24/00
DATE

Bruce K. Sauer
NAME OF INVENTOR

[Signature]
Signature of Inventor

10/26/00
DATE

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: KIM Y. KAO ET AL. Application No.: Filed: November 7, 2000 For: METHOD AND APPARATUS FOR SELECTING, MONITORING, AND CONTROLLING ELECTRICALLY POWERED DEVICES	[Examiner: K. Schuster] [Art Group: 2182]
DIVISIONAL of Application: Application No.: 09/088,213 Filed: May 29, 1998	

PRELIMINARY AMENDMENT

BOX PATENT APPLICATION

Assistant Commissioner for Patents
Washington, DC 20231-9998

Sir:

The subject Application, a divisional of the above-identified parent Application, is being filed concurrently. Applicant respectfully requests amending the subject Application as follows:

IN THE SPECIFICATION

On page 1, lines 2-5, please delete the entire paragraph and insert the following:

-- This is a divisional of Application No. 09/088,213, filed May 29, 1999, which is a continuation -in-part patent application of U.S. Patent No. 5,901,067--.

IN THE CLAIMS

Please cancel claims 1-11, without prejudice.

Please amend claims 18 and 19 as follows:

1 18. (Amended) The apparatus of claim 12 wherein the circuit is a current to
2 voltage converter [and alternatively an ammeter].

1 19. (Amended) The apparatus of claim 12 wherein the electrically powered
2 device is a copier [and alternatively a laser printer].

Please add claims 20-32 as follows:

1 20. (New) The apparatus of claim 12, wherein the electrically powered device is a
2 laser printer.

1 21. (New) The apparatus of claim 12, wherein the circuit is an ammeter.

1 22. (New) A method comprising:
2 monitoring an output of an electrically powered device; and
3 comparing the output to a database of operating profiles for the electrically powered
4 device to detect a first condition and to adjust billing charges when the electrically powered
5 device is in the first condition.

1 23. (New) The method of claim 22, wherein the first condition is an abnormal
2 condition.

1 24. (New) The method of claim 23, wherein the database of operating profiles
2 includes regular operating profiles and abnormal operating profiles, each to denote an
3 abnormal condition.

1 25. (New) The method of claim 23, wherein the database of operating profiles
2 includes a plurality of power usage profiles.

1 26. (New) The method of claim 25, wherein each power usage profile is a
2 function of amperage and time.

1 27. (New) The method of claim 26, wherein the abnormal condition is a paper
2 jam.

1 28. (New) The method of claim 23, wherein the first condition is a catastrophic
2 condition.

1 29. (New) A software module embodied for execution by a controller, the
2 software module comprising:
3 software to monitor an output of an electrically powered device; and
4 software to compare the output to a plurality of power usage profiles for the
5 electrically powered device to detect a first condition and to adjust billing charges when the
6 electrically powered device is in the first condition.

1 30. (New) The software module of claim 29, wherein the electrically powered
2 device is placed in the first condition in response to an abnormal operating condition.

1 31. (New) The software module of claim 29, wherein the abnormal condition is a
2 paper jam.

1 32. (New) The software module of claim 29, wherein each power usage profile is
2 a function of amperage and time.


REMARKS

This Preliminary Amendment is filed concurrently with a Divisional Application under 37 C.F.R. §1.53(b). The Divisional Application is in response to an election requirement imposed by the Examiner during prosecution of the parent application. Applicants respectfully request examination of the pending claims at Examiner's earliest convenience.

Respectfully submitted,

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP

Dated: November 07, 2000


WILLIAM W. SCHAAL
Reg. No. 39,018

UNITED STATES PATENT APPLICATION

FOR

METHOD AND APPARATUS FOR SELECTING,
MONITORING, AND CONTROLLING ELECTRICALLY
POWERED DEVICES

Inventors:

KIM Y. KAO
BRUCE K. SAUER
KENT KWAN

Prepared by:

BLAKELY SOKOLOFF TAYLOR & ZAFMAN LLP
12400 Wilshire Boulevard, Seventh Floor
Los Angeles, CA 90025-1026
(714) 557-3800

CROSS-REFERENCES TO RELATED APPLICATIONS

This is a continuation-in-part of a co-pending United States patent application entitled "System for Interactively Selecting and Activating Groups of Electrically Powered Devices" filed on November 15, 1996 (Application No.

5 08/749,905).

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to a method and apparatus for
10 selecting, monitoring, and controlling electrically powered devices.

2. Background Information

A known approach to monitoring the usage of computers and peripheral devices is through a network. Such an approach to monitoring the status of electrically powered equipment for the purpose of generating billing is deficient
15 in that it is highly complicated, requires bi-directional communications, and cannot readily be adjusted to compensate for changes in the communication interfaces and interface hardware of the monitored devices.

In addition to monitoring usage of computers and computer peripheral devices, it is desirable to be able to remotely activate and deactivate such devices.
20 Current technology employing alternating current ("A/C") lines is deficient in that it does not provide bi-directional feedback.

Known computer rental outlets (e.g., such as Kinkos™) depend upon activation inputs from human employees and, therefore, operate at greater expense. Accordingly, it is also desirable to provide a system which automates the activation and deactivation of electrically powered devices. Although it is
5 known to functionally connect an electrically powered device to a mechanism for receiving payment, the art is devoid of a self-service system which allows multiple users to simultaneously select, activate, and prepay for the use of groups of electrically powered devices.

One method of charging for the use of electrically powered equipment
10 such as a copier or a computer is by the amount of time that the device is used. However, one problem with charging a user based on the amount a device is used is that if such device hangs up, jams, or is otherwise not operating properly, the user will still be charged for the time.

Accordingly, there is a need in the technology for a method and apparatus
15 to automatically monitor and detect an abnormal/catastrophic condition of an electronic device through the usage of power in order to suspend billing of a user's account during the time period which the electronic device is not in proper operation.

It is further desirable to provide a method and apparatus for selecting,
20 monitoring, and controlling electrically powered devices and their internal control circuits.

SUMMARY OF THE INVENTION

In one embodiment, the present invention is an apparatus which includes an electrically powered device having a key operating line and switching control circuitry to control usage of the electrically powered device by interrupting
5 continuity of the key operating line.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of a system for interactively selecting, activating and monitoring the usage of groups of computers and computer peripheral devices according to the present invention.

5 Figure 2 is a block diagram showing the functional relationship between the central controller and a plurality of stations adapted to receive electrically powered devices.

10 Figure 3 is a front perspective view of a stand-alone embodiment of the system for interactively, activating and monitoring the usage of selected computer and computer peripheral devices.

Figure 4 is a rear perspective view of the system shown in Figure 3.

Figure 5 shows the interactive user interface of the present invention.

Figures 6A and 6B show an operational flowchart of a controller interface software module according to one embodiment of the present invention.

15 Figures 7A and 7B show an electrical schematic of the communication link circuitry of one interactive electrical device selecting and activating system.

Figure 8 shows an electrical schematic of the switching control circuitry of one interactive electrical device selecting and activating system.

20 Figure 9 is a functional block diagram of an alternative embodiment of the system 30.

Figure 10 illustrates a system, in accordance with an alternative implementation of the present invention.

Figure 11 is a block diagram illustrating one embodiment of a system for monitoring the status of and controlling one or more electrically powered devices.

Figure 12 illustrates an exemplary power profile for a laser printer.

5 Figure 13 is a flow diagram illustrating an exemplary process of the software module.

DETAILED DESCRIPTION

Figure 1 shows an exemplary system 30 for interactively selecting and activating one or more electrically powered devices. In this embodiment, the system 30 includes one or more computers 40 and/or one or more computer peripheral devices (e.g., printer 42). While the exemplary system 30 includes computers, computer peripherals, and/or other devices typically found in an office, it is contemplated that the one or more electrically powered devices could include appliances such as, for example, a television or coffee maker.

The system 30 additionally includes a display 44 which comprises a video monitor as shown in this embodiment. The system 30 may also include a mechanism for receiving payment, such as, for example, a card reader 46 for obtaining information from a credit card, pre-paid debit card, smart card, membership card, room key, or any other type of card. Alternatively, the mechanism for receiving payment can take another form such as a coin and/or currency receiving mechanism, a biometric recognition system linked to a database of personal or business accounts to verify characteristics of the user (e.g., fingerprint, retinal scan, voice recognition, etc.).

A first key aspect of the present invention is that the system 30 provides its users with a self-service means for selecting and activating particular groups of electrical devices from a plurality of electrical devices. One or several controllers and a switching mechanism are required to implement the system 30. In the exemplary embodiment shown in Figure 1, the display 44 presents a sequence of menus which interactively prompt a user of the system 30 to provide user inputs which, for example, designate one or more (or a selected group of) devices from a computers 40 and computer peripheral devices 42. At

least one of the aforementioned controllers executes a computer executable program or programs for providing user interface control signals to the display 44. The switching mechanism also receives switching control signals generated by execution of a computer executable program by at least one of the controllers.

- 5 In one embodiment, a computer executable program is also employed to control a means for providing communication links between printer ports and a printer. As discussed below in greater detail, the system 30 may include additional computer executable programs providing communications interfaces to other computers, intelligent peripherals (e.g., payment receiving mechanisms),
10 telecommunications hardware (e.g., telephones, facsimile machines).

Another key aspect of the present invention is that the system 30 also includes interconnection hardware and the communications interfaces necessary for a user to "dock" a personal computer 32 or other electrically powered device to the system 30. As discussed below in greater detail, a controller or processor of
15 the system 30 controls a sequence of interactive visual menus presented at the display 44 thereby allowing the user to select and activate a group of electrically powered devices. More specifically, the user selects a group of "stations" (to which electrically powered devices may be, but are not necessarily, connected). In one embodiment, a "station" is defined as a power outlet that the system 30 is
20 capable of selecting and providing power to, combined with a communications interface that is controlled and accessible by a controller or processor of the system 30. For example, a user may "dock" a notebook style personal computer 32 to the system 30 by selecting the appropriate station at the display 44. The system 30 executes software which applies power to the power outlets of the
25 selected stations and enables the communications interface at the selected stations. The communications interface hardware at the stations comprises

connectors facilitating operable connection to currently favored computers and computer peripheral devices.

The system 30 may include redundant computer and computer peripheral devices so that more than one user can simultaneously create, activate and use "custom offices". Accordingly, the system 30 intended to accommodate more than one user can have one or more display 44. The software executed by the system 30 monitors the availability of the computer and peripheral devices and provides a prospective user with an indication that a specified device is unavailable when no such device is currently available for use. As may be readily appreciated, various advanced features may be implemented including, but not limited to, allowing a prospective user to reserve the next available device of a presently unavailable type of electrically powered device. In an embodiment with a payment receiving mechanism 46, the system 30 executes software which allows more than one user to make payment at the same time.

As shown in Figure 1, the various electrically powered devices may be positioned in distinct areas separated by partition members 48. As may be readily appreciated, the computer and computer peripheral devices may be segregated in a manner which anticipates typically selected combinations of office equipment.

Figure 2 is a block diagram showing the functional relationship between a central controller 50 and a plurality of stations adapted to receive electrically powered devices. By way of example, the central controller 50 is functionally interconnected to a station 52 and is adapted to provide power and a communication link to a facsimile machine. As shown in Figure 2, the central controller 50 provides power and communications interfaces to a station 54 which, for example, is adapted to receive a controller interface computer. A

station 56 is similarly controlled by the controller 50 which determines when power is made available to a copier and provides a communication link to the copier. A station 58 can, for example, provide power and communications links to an electrically interconnected computer and printer which have been
5 configured to be used together. A station 60 is similarly configured to provide power and communications links to a modem. Additional stations such as stations 62, 64 can also be included in the system 30. The stations 62, 64 allow other computer and computer peripheral devices to be docked to and used with the system 30.

10 In this embodiment, the central controller 50 additionally supports the system task of determining whether or not payment has been made by a prospective user of the system. For example, the central controller 50 receives inputs from a credit card reader. As shown in Figure 2, a printer 66 is also electrically connected to the controller 50. The printer 66 may be designated as a
15 dedicated printer which, for example, receives control signals from the central controller 50 and is only used to print receipts for payment or prepayment by the user. In another embodiment, an additional printer (not shown), in addition to or in lieu of printer 66, may be placed at a remote location such as a front desk or cashier's counter for printing receipts, statements, etc. The electrical connection
20 between printer 66 and/or the second printer and the controller 50 may be wired or wireless via radio frequency ("RF") modules.

Figure 9 is a functional block diagram of an alternative embodiment of the system 30. In this embodiment, the controller 50 provides user interface control signals to a touch screen display. The system 30 also includes a switch box 68
25 which receives switching control signals from the controller 50 along control signal path 70. It is contemplated that, in another embodiment, the switching

control signals from the controller 50 to the switch box 68 may be wireless via RF modules. As shown in Figure 9, the system 30 also includes a connection link switch box 72 which, for example, selectively provides communication links between one of the printer ports (of the controller 50 and the peripheral computer at station 58) and the peripheral printer at station 58. The operational aspects of the switch boxes 68, 72 are discussed below in greater detail. It should also be appreciated that the two switch boxes 68, 72 can be configured within a single switch box. As discussed above, the controller 50 can also be adapted to support various telephonic data communication interfaces such as a charge-a-call phone line interface 74, a coinless pay phone equivalent.

The system 30 may optionally include a printer 34 located at a secure, remote location such as a front desk of a hotel. In this way, a user may use a room key having a magnetic strip to pay for usage of the system 30, in which case the receipt will be printed at the front desk. The hotel personnel can then add the cost of usage of the system 30 to the user's room bill. Alternatively, the remote printer 34 may be located at a centralized location for billing members who use member cards. These connections made accomplished via wired or wireless methods.

Figure 3 is a front perspective view of a stand-alone embodiment of the system 30. Figure 4 is a rear perspective view of the system shown in Figure 3. The stand-alone version of the system includes a pedestal unit 76 with a plurality of shelves 78 upon which computer peripheral devices are placed. The controller 50 and switch boxes 68, 72 can be physically positioned within the pedestal unit 76 or, alternatively, remotely located. Exemplary computer peripheral devices include laser printers 80 and a facsimile machine 82. As seen in Figure 4, the system 30 includes a power strip 84 which is electrically

connected to and controlled by the switch box 68. Alternatively, the power strip 84 may be positioned within the pedestal unit 76 or at some other location which is not readily accessible by users. Although the stand-alone unit is shown in a kiosk configuration, it should be appreciated that other types of furniture,

5 equipment bays, etc., may be employed particularly if the computers and computer peripheral devices need to be more optimally secured to prevent their theft or attempts by users to manually override control signals from the controller 50. Alternatively, the controller 50 may be operated remotely via conventional networking schemes using the same interface methods.

10 Conventional networking schemes include, for example, the Microsoft™ Windows™ network, Ethernet network, a dial-up modem (e.g., via telephone line), and the like. In addition, the controller 50 may be operated remotely through the Internet.

As best seen in Figure 5, an interactive user interface is presented at the display 44. A main menu display 86 is first presented to a prospective user of the system 30. The user interface control signals initiate a sequence of interactive displays. The interactive displays include various fields providing information or facilitating user inputs. One means for receiving user inputs is a touch screen as shown in Figure 5. Information display fields 88 can, for example, be
15 employed to provide a prospective user with information about the cost per minute for using various computer and computer peripheral devices. An information icon 90 initiates execution of computer executable programs which provide the user with information relevant to selected or indicated aspects of the system 30. Similarly, a help icon 92 is presented to the user and initiates the
20 execution of an executable program or programs which provide a user with
25

additional information explaining how devices are selected, activated, prepayment is made, receipts obtained, etc.

In an exemplary system 30, the available computer and computer peripheral devices include a computer, printer, facsimile machine and copier.

5 These electrically powered devices are respectively selected by pressing device selection icons 92, 94, 96, 98. However, the exemplary system 30 may include other devices such as, for example, a scanner, fax/modem for access to the Internet, etc. The main menu screen 86 additionally includes a device selection icon 100 which, when depressed by a user, initiates activation of a computer,
10 printer, facsimile machine and copier as if all of the device selection icons 92, 94, 96, 98 had been depressed. The main menu screen 86 additionally includes credit card designation icons 102 which facilitate payment or prepayment by the user.

Figures 6A and 6B show an operational flowchart of a controller interface software module according to one embodiment of the present invention. A
15 main display menu executable block 110 facilitates the display of currently entered user information, accrued charges and operational status information of the various computer and computer peripheral devices. Additionally, executable block 110 provides for the responsivity of portions of the touch screen for the purpose of selecting electrically powered devices for activation or
20 deactivation.

Executable block 112 responds to user inputs. If the user provides an "activate equipment" input, the executable program is redirected toward executable block 114. If the user provides a "deactivate equipment" input, the executable program is redirected toward executable program block 116 (Figure
25 6B). Additionally, a user may provide an "other functions" input. In response

to such an input, the executable program is redirected toward executable program block 118 as shown in Figure 6A. The "other functions" menu block 118 can be programmed to provide a variety of advertising displays, promotional offers and telephone and interconnect connections and services as well as on-line support
5 features.

Another key aspect of the present invention is that the system 30 is configured to operate as a self-service facility. As such, sufficient information must be provided to prospective users. When execution of the "activate equipment" executable block 114 is initiated, a brief video clip illustrating how a credit card is used to prepay is shown to the user. In addition or alternatively, the
10 controller interface computer requests the user to input credit card information such as the account number and expiration date.

As shown in Figure 6A, the controller 50 processes the next user input at executable block 120 which either receives the credit card information entered or
15 cancels the transaction depending upon the user input. If the transaction is canceled, the executable program is redirected to the "main display menu" executable block 110. If the user elects to continue with the transaction, the executable program is redirected to a "process credit card hold via modem" executable block 122. At a "user input" executable block 124, the user is given an
20 opportunity to approve charging the transaction to the credit card after the transaction has been approved or to cancel the transaction. After a user approves a transaction, a "disclosure statement" executable block 126 controls the display of pertinent limitations and other information to the user. For example, information may be provided to the user that a selected computer or computer
25 peripheral device may only be reserved for up to one hour. Other displays may also be presented such as credit card terms and conditions and disclosures or

other information that should or must (required by an applicable law or regulation) be presented to the user.

After the disclosure statement is presented to the user, the executable program is redirected to an executable program block 128 which controls the generation of control signals including switching control signals which are provided to the switch box 68. In one embodiment, the control signals additionally include communication link control signals which, for example, are provided to the switching box 72 to establish communication links between the various electrically powered devices. The executable block 128 additionally monitors usage of the activated computer and computer peripheral devices. The usage is monitored so that the users are appropriately billed after the electrically controlled devices are deactivated and to assure that any predetermined usage limitations such as a maximum time duration are not exceeded.

With reference to Figure 6B, a "maximum duration exceeded" executable block 130 displays a warning when the maximum duration has been exceeded and, in one embodiment, also displays an option to continue usage. A "user input" executable block 132 redirects the executable program depending upon the user input provided. If the user provides an input indicating a desire to continue using the electrically powered devices, the user is prompted to verify previous inputs and/or provide additional user inputs and the activated devices remain activated or are reactivated as the case may be. As may be readily appreciated, the controller interface software module could also be programmed to provide users with options to add or delete various peripheral devices when a usage session comes to an end or prior to that time. The equipment usage monitoring feature may result in the recordation of the exact amount of time any particular computer or computer peripheral device is activated, round to a

nearest minimum time unit (e.g., 10 minutes) or simply bill a user for an amount of time no less than the amount of time reserved and no greater than the maximum amount of time allowed.

If a session comes to an end and a user fails to provide a response, the executable program is redirected toward executable block 134 which generates the appropriate switching control signals to deactivate or disconnect power sources. It should be appreciated that the deactivated power sources are those which are connected to computer and computer peripheral equipment previously activated by the particular user who has failed to respond. The controller software may be programmed to provide the user with a predetermined amount of time to respond (e.g., one minute) before power is removed from the equipment. In the system 30, a usage session is prepaid so that human system attendants are unnecessary. Furthermore, prepayment makes it convenient for a user to rapidly terminate a session and receive a receipt without having to wait for credit card approval, credit line verification or the like. At executable block 134, the receipt is printed without account information to protect a user who is suddenly called away from a usage session.

When a user provides a "deactivate equipment" input, the executable program is directed toward the executable block 116 as shown in Figure 6B. After the executable block 116 is initiated, the controller 50 calculates and sends control signals facilitating the display of updated charges. The user is also asked to confirm that deactivation is desired. After the user responds to the request for deactivation confirmation, an executable block 136 either confirms deactivation or cancels the request for deactivation and redirects the executable program such that device usage will continue.

When the user provides an input confirming deactivation, a "printing of receipt options" executable block 138 is initiated. The executable block 138 presents the user with the option of receiving a receipt with or without personal account information or, alternatively, the option of receiving no receipt. The user's response is processed by a "user input" executable block 140 after which the executable program is redirected to an executable block 142 as shown in Figure 63. The executable block 142 controls the printing of receipts; and thereafter sends control signals to remove power from the appropriate electrically powered devices via the switch box 68.

Figures 7A and 7B show an electrical schematic of communication link circuitry 150 of a system 30. The communication link circuitry 150 may be, but is not necessarily, located within the switch box 72 (Figure 9). Generally the communication link circuitry 150 acts as a switch determining which of several communications ports is electrically connected to a peripheral device such as a printer. Referring again to Figure 9, the controller 50 and the peripheral computer at station 58 both include printer ports. The peripheral printer at station 58 is connected to one of the aforementioned printer ports via the communication link circuitry 150. Parallel printer port connections 152 (Figure 7A) and parallel printer port connections 154 (Figure 7B) are respectively connected to two different computers such as the controller 50 and the peripheral computer at station 58 via currently favored connection hardware, e.g., conventional 25-pin D-connectors. Parallel printer port connections 156 (Figure 7A) are connected, for example, to the peripheral printer at station 58 (Figure 9). Referring again to Figures 7A and 7B, the unidirectional buffer circuitry 158 may be replaced with bi-directional relay circuitry to facilitate bi-

directional communications. Referring to Figure 7B, protection circuitry 160 may also be included.

Figure 8 shows an electrical schematic of switching control circuitry 170 according to one system 30. Connections 172 are electrically connected to a control port of the controller 50. In one embodiment, 8 bits of data are provided to the connections 172 at a printer port of the controller 50 which has been programmed to function as a control port. The 8 bits of data are provided to a data latch integrated circuit 174 which, for example, comprises a standard 74LS373 integrated circuit chip. The outputs of the data latch integrated circuit 174 are provided to analog transistor circuitry 176 which provide inputs to relays (not shown) for controlling the activation and deactivation of the stations. The individual transistors 178 comprise, for example, a conventional 2N2222 transistor. As shown in Figure 8, light emitting diodes ("LEDs") may be provided if desired.

Figure 10 illustrates a system 200, in accordance with an alternative implementation of the present invention. In this implementation, the system 200 interactively selects and activates key operating control lines of electrically powered devices (e.g., computer and computer peripheral devices) by maintaining or interrupting continuity of such control lines in addition to or in lieu of selecting and activating power to such devices. Referring to Figure 10, the system 200 includes the touch screen controller 50 which controls the switch box 68 through control signals along control signal path 70. The system 200 further includes a computer 210 which is coupled to and/or controlled by an I/O device 212 through one or more key operating control lines 214 and 216. In general, a key operating control line includes a signal line which may be external or

internal to an electrically powered device and controls the functionality of the device, either alone or in combination with other key operating control lines.

For example, the I/O device 212 may be a keyboard with the key operating control line 216 being a power or communication line from the keyboard to the computer 210. The key operating line 216 couples the I/O device 212 to the computer 210 through an activator device 218 (e.g., a relay, combinational logic, etc.). The activator device 218 is controlled by the switch box 68 via communication line 202 which selectively activates/deactivates the activator device 218 for maintaining or interrupting continuity of the key operating line 216 from the I/O device 212 to the computer 210.

It is contemplated that the I/O device 212 may be a mouse, monitor, modem or any other device used for controlling the computer 210 or a peripheral of the computer. For example, at least one activator device 218 may be coupled between a transmit and/or receive line between the computer 210 and a modem to maintain or interrupt continuity of an Internet session. It is further contemplated that the switch box 68 may control more than one I/O device for a single electrically powered device such as a computer. For instance, if a session comes to an end and a user fails to respond, the controller 50 may control the switch box 68 to interrupt continuity of a keyboard, mouse, and/or monitor such that the user is precluded from controlling the computer 210.

In addition or in the alternative, the system 200 controls a peripheral device 220 (e.g., a copier) via communication line 204 by activating/deactivating a control device (e.g., a relay) for maintaining or interrupting continuity of one or more key operating control lines of the peripheral device 220. In one embodiment, a control device 224 is coupled between key operating control lines

226 and 228 of a counter (or "Auditron counter") 222. When activated, the control device 224 provides continuity between key operating control lines 226 and 228 which allows the peripheral device 220 to operate. When deactivated by the switch box 68, the control device 224 interrupts continuity of key operating control lines 226 and 228 which prevents the peripheral device 220 from operating.

Alternatively, a control device 234 may be coupled between a sensor 232 and the input to a controller 236. In this manner, the control device 234 may be controlled by the switch box 68 to mimic the sensor 232. The sensor 232 may be one of a number of key operating sensors of a copier, for example, such as a paper out, toner out, door cover ajar, or paper jam sensor, etc., all of which cause the copier to halt operation. When continuity is to be interrupted, the switch box 68 deactivates the control device 234 to indicate to the microcontroller 236 via key operating control line 238 that there is a halt condition, thereby interrupting the operation of the peripheral device. Through this control mechanism, the continuity of the peripheral device can be maintained or interrupted without cycling power on and off to such device. The advantage of controlling continuity of key operating control lines is that electrically powered devices do not have to be turned off and on.

It is further contemplated that the switch box 68 may control a vending machine 240 via communication lines 206. The vending machine 240 includes a plurality of motors 242 for controlling a corresponding plurality of coils 244 for dispensing various items. A transformer may optionally be placed in between each communication line 206 and each motor 242 in the case of a direct current motor. When a motor is activated by the switch box 68, its corresponding coil initiates a predetermined cycle of rotation to dispense one item. The touch

screen controller 50 may execute a controller interface software module for providing a series of menus where a user can select one or more of a number of items from the vending machine 240. The items may include, for example, common "snacks", office supplies (e.g., paper, pen, floppy disk, etc.), and the like.

5 In an alternative embodiment, the system 30 or the system 200 may be used as a centralized system to control other types of electronically powered devices. For example, the system may be implemented in a Laundromat for centrally controlling washing machines, dryers, etc., in a self-service car wash for centrally controlling car-wash stations, or in an arcade for centrally controlling
10 video games, amusement games, etc.

 It is further contemplated that the system 200 may be used to control the usage of software on a selected computer via controlling a software key (hereinafter referred to as a "Dongle"). This mechanism allows a user to be charged on a per-software basis (e.g., for using a word processor, spread sheet
15 program, etc.) rather than a per-computer basis. This can be accomplished, for example, by connecting a Dongle to an I/O port of the computer (e.g., printer port), placing an activator device (e.g., relay) in series with a key operating line of the Dongle, and controlling the relay by the switch box 68. Thus, the controller 50 may control usage of software programs by maintaining and/or interrupting
20 continuity of the Dongle. A script program may be written so that each application software program that is selected by the user first checks the status of a Dongle and, if the relay is activated by the switch box 68 (and the controller 50), indicating that the user has paid to use the software program, the software program executes properly and may be used by the user.

A further aspect of the present invention is an efficient and easy-to-implement method and apparatus for monitoring the status of and controlling such electronic devices. A special circuit is provided which provides measurement of the power (amperage) utilized by each electronic device. By
5 monitoring power usage, the power usage profile of each specific electronic device can be forwarded to the touch screen controller 50. The power usage profiles are then analyzed by software running on the controller 50 to determine the operating status of the electronic device. This may be accomplished by using a standard database of power usage profiles to identify normal type operations
10 and abnormal, catastrophic types of activity exhibited by the electronic devices.

Figure 11 is a block diagram illustrating one embodiment of a system 300 for monitoring the status of and controlling one or more electrically powered devices. Referring to Figure 11, the system 300 includes the touch screen controller 50 which is coupled to the switch box 68 by way of signal path 70 which
15 may be an I/O port, parallel port, etc. The switch box 68 is coupled to a relay 312 for activating and deactivating the same. The relay 312, when activated, couples a power controller 318 (e.g., for supplying A/C power) to an electrically powered device 320 (e.g., computer, copier, fax, and any other electrically powered device). The device 320 is coupled to the relay 312 through a current to voltage converter
20 314. In one embodiment, the current to voltage converter 314 is an inductive ammeter. The current to voltage converters 314 is also coupled to a channel of an analog to digital ("A/D") converter 316 via signal line 315. In one embodiment, when the relay 312 is activated by the switch box 68, the current to voltage converter 314 outputs a voltage in the millivolt range that corresponds
25 to the power output of the electrically powered devices 320. It is contemplated that the system 300 includes a plurality of such relays and current to voltage

converters for monitoring a corresponding plurality of electronically powered devices.

The A/D converter 316 is coupled to the controller 50 by way of signal path 305 (e.g., I/O port, parallel port, etc.). When the device 320 is on (i.e., by
5 activating the relay 312), the power usage of the device is transferred by the current to voltage converter 314 to the A/D converter 316. The A/D converter 316 converts the analog voltage into a digital stream and provides it to the controller 50.

In one embodiment, the switch box 68, relay 312, current to voltage
10 converter 314, A/D converter 316, and the power controller 318 are all contained within an electronic switch box interface 310. In another embodiment, it is contemplated that the A/D converter 316 may be directly coupled to the bus of the controller 50 by way of, for example, a Peripheral Component Interconnect ("PCI") form factor card. The electrically powered devices include, for example, a
15 computer, copier, fax machine, laser printer, other types of peripheral devices, appliances (e.g., coffee maker, rice cooker, television, washing machine, etc.), and the like. In yet another embodiment, the switch box 68 may be replaced with a digital to analog ("D/A") converter which is contained on the same board as the A/D converter 316.

20 The controller 50 includes a software module that provides the user interface for the operation and use of the system. In addition to recording user requests on the operation of the peripheral devices, the software module also determines the operating status and on/off control to the peripheral devices. The software module further allows the user to specify the time, duration, and
25 conditions within which to turn on/off a selected electrically powered device.

The conditions for on/off operations may include specific predetermined time and date, a temperature light sensor, by way of remote control via wireless or telephone access.

The monitoring of the status of an electrically powered device is accomplished by recording and analyzing the digital output from the A/D converter 316 for a particular electrically powered device and comparing it to standard operating profiles for such device. A database of standard operating profiles, representing both regular operating profiles and abnormal/catastrophic (i.e., erroneous) operating profiles, may be maintained in a memory unit (not shown) of the controller 50. The software module continuously monitors the power profiles of the activated devices. If a device exhibits a power profile that represents a catastrophic/halt condition (i.e., a paper jam), the software module suspends charging a user for the time that such device is halted.

A learning mode is provided so that the controller 50 can be adapted to monitoring new electrically powered devices which are plugged into the system. The learning process includes establishing a baseline power consumption and typical operating conditions of the new electrically powered devices. More importantly, abnormal/catastrophic (i.e., erroneous) operating conditions are simulated and recorded onto the database. These power consumption profiles are the basis for the software module to determine the appropriate on/off state for the electrically powered device. The software module includes a user interface which allows programming the on/off of the peripheral devices via user specified conditions. In addition, the software module includes an algorithm which records power utilization profiles and makes comparisons with an established database of power utilization profiles.

Figure 12 illustrates an exemplary power profile for a laser printer.

Referring to Figure 12, the power profile shows time periods 410 where the laser printer is printing. At time periods 420, the laser printer is in idle mode, as shown by the periodic spikes 425. At time period 430, the laser printer has a paper jam. During this unique period, the laser printer draws minimal power and has no significant spikes. Thus, if a paper jam occurs, the controller 50 will detect a halt condition by comparing the stored profile in the database with the actual profile of the laser printer or by detecting that the power usage fails to rise above a predetermined threshold for a predetermined time period.

Figure 13 is a flow diagram illustrating an exemplary process 500 of the software module. Referring to Figure 13, the process 500 includes a learning mode and an operating mode (default). At block 502 if the learning mode is selected (e.g., during setup of a device by a system administrator), the process proceeds to block 504 where a power usage profile is established for the selected device. In one embodiment, the power usage profile is a function of amperage and time. The power usage profile of the selected device includes, for example, the power usage profile during normal operating conditions, abnormal conditions (e.g., paper jam), and catastrophic conditions. Then at block 506, the power usage profile of the selected device is stored in a database. At block 508, if the learning mode is complete, the process jumps back to block 502, otherwise the process jumps to block 504 for establishing the power usage profile for another device.

At step 502, if the operating mode is selected, the process 500 performs initialization at block 512. Thereafter, at block 514, the process 500 detects a valid method of payment (e.g., a credit card swipe), turns on an electrically powered device selected by the user, and initiates a billing timer. At block 516 a

determination is made as to whether the user is done with the usage of the electrically powered device, e.g., by the user pressing an "END" button on a touch screen or the time period selected runs out. If the user is done, the process jumps to block 528 where the billing timer is stopped and power removed to the device or alternatively the continuity of a key operating control line is interrupted.

Conversely, if the user is not done, the process proceeds to block 518 where the power usage is monitored and compared with the stored power usage profile of the device. At step 520, the power usage profile of the device is determined. If the device is in normal operation, the process jumps back up to block 516. If an abnormal condition is detected, the process proceeds to block 522 where billing is suspended and a warning message is displayed. Then, at block 524 the device is monitored and the billing timer is resumed when the device is back to normal condition. The process then jumps to block 516. If at block 520, a catastrophic condition is detected, then the process proceeds to block 526 where a warning message is displayed. The process continues to block 528 where the billing timer is stopped and the device is shut down.

The monitoring of the power usage profile of an electrically powered device provides the advantage of detecting an abnormal/catastrophic operation of the electrically powered device (e.g., when a copier has a paper jam) and automatically suspending billing for usage of that electrically powered device during such abnormal catastrophic condition.

While certain exemplary embodiments have been described and shown in the accompanying drawings, it is to be understood that such embodiments are merely illustrative of and not restrictive on the broad invention, and that this

invention not be limited to the specific constructions and arrangements shown and described, since various other modifications may occur to those ordinarily skilled in the art.

CLAIMS

What is claimed is:

- 1 1. An apparatus comprising:
2 an electrically powered device having a key operating line; and
3 switching control circuitry to control usage of the electrically powered
4 device by interrupting continuity of the key operating line.

- 1 2. The apparatus of claim 1 wherein the at least one electrically
2 powered device includes a computer and alternatively a computer peripheral
3 device.

- 1 3. The apparatus of claim 1 further comprising:
2 a controller to generate control signals including user control signals to
3 control the electrically powered device; and
4 a display, responsive to the user interface control signals, to interactively
5 prompt a user to provide user inputs to the controller, the user inputs including
6 (i) a designation of a selected group of electrically powered devices from the at
7 least one electrically powered device and (ii) a prepayment method designation.

- 1 4. The apparatus of claim 2 further comprising an input/output
2 device coupled to the computer by the key operating control line through an
3 activator device, said switching control circuitry to control the activator device by
4 interrupting continuity between the input/output device and the computer.

1 5. The apparatus of claim 4 wherein the input/output device is a
2 keyboard and alternatively a mouse.

1 6. A system, comprising:

2 a plurality of computer and computer peripheral devices, the plurality of
3 computers including a controller interface computer which executes a controller
4 interface software module to generate control signals including user interface
5 control signals;

6 a display responsive to the user interface control signals and adapted to
7 interactively prompt a user to provide user inputs to the controller interface
8 computer, the user inputs including (i) a designation of a selected group of
9 devices from the plurality of computer and computer peripheral devices and (ii)
10 a prepayment method designation; and

11 switching control circuitry connected to each of the plurality of computer
12 and computer peripheral devices, the switching control circuitry, responsive to
13 the control signals, to control usage by interrupting continuity of at least one key
14 operating line of one or more of the plurality of the computer and computer
15 peripheral devices.

1 7. The system of claim 6 wherein the controller interface computer to
2 receive the user inputs, process the user inputs by establishing communication
3 with a remotely located device to request approval of a financial transaction, and
4 generate control signals in response to receiving approval.

1 8. The system of claim 6 wherein the key operating control line
2 controls the functionality of the one or more computer and computer peripheral
3 devices.

1 9. The system of claim 6 wherein the controller interface computer
2 may be operated remotely through a network to generate control signals
3 including user interface control signals.

1 10. A system comprising:
2 a vending machine including at least one electrically powered device;
3 a controller to generate control signals including user interface control
4 signals;
5 a display responsive to the user interface control signals to interactively
6 prompt a user to provide user inputs to the controller, the user inputs including
7 (i) a designation of a selected group of devices from the at least one electrically
8 powered device and (ii) a prepayment method designation; and
9 switching control circuitry connected to each of the at least one electrically
10 powered device of the vending machine, the switching control circuitry,
11 responsive to the control signals, to provide power to the at least one electrically
12 powered device to dispense an item.

1 11. The system of claim 10 wherein each electrically powered device is a
2 motor to control a corresponding dispensing mechanism.

1 12. An apparatus to monitor usage of an electrically powered device,
2 comprising:
3 a circuit coupled to the device to provide a power output of the device;
4 an analog to digital converter coupled to receive the power output and
5 convert the same to digital form; and
6 a controller to receive a user input, process the user input by establishing
7 communication with a remotely located device to request approval of a financial
8 transaction, and generate control signals in response to receiving approval, the
9 controller receives the digital form of the power output and monitors the
10 operation of the electrically powered device.

1 13. The apparatus of claim 12 further comprising a switching device
2 coupled between the electrically powered device and a power source, said
3 switching device to control power to the device, responsive to the control
4 signals.

1 14. The apparatus of claim 12 wherein the controller includes a
2 database of power profiles of the device and compares the digital form of the
3 power output to the power profiles, said controller suspends charging for usage
4 of the device if the digital form of the power output indicates a halt condition.

1 15. The apparatus of claim 14 wherein the database of power profiles
2 includes normal operation power profiles, idle operation power profiles, and
3 halt condition power profiles.

1 16. The apparatus of claim 14 wherein the controller continues to
2 suspend charging for usage of the device as long as the device is in halt
3 condition.

1 17. The apparatus of claim 13 wherein the switching device is a relay.

1 18. The apparatus of claim 12 wherein the circuit is a current to voltage
2 converter and alternatively an ammeter.

1 19. The apparatus of claim 12 wherein the electrically powered device is
2 copier and alternatively a laser printer.

ABSTRACT OF THE DISCLOSURE

An apparatus for selecting, monitoring, and controlling electrically powered devices is disclosed. In one embodiment, the apparatus includes an electrically powered device having a key operating line and switching control circuitry to control usage of the electrically powered device by interrupting continuity of the key operating line. In another embodiment, the apparatus monitors usage of an electrically powered device. The apparatus includes a circuit which is coupled to the device to provide a power output of the device, an analog to digital converter coupled to receive the power output and convert the same to digital form, and a controller to receive a user input, process the user input by establishing communication with a remotely located device to request approval of a financial transaction, and generate control signals in response to receiving approval. The controller receives the digital form of the power output and monitors the operation of the electrically powered device.

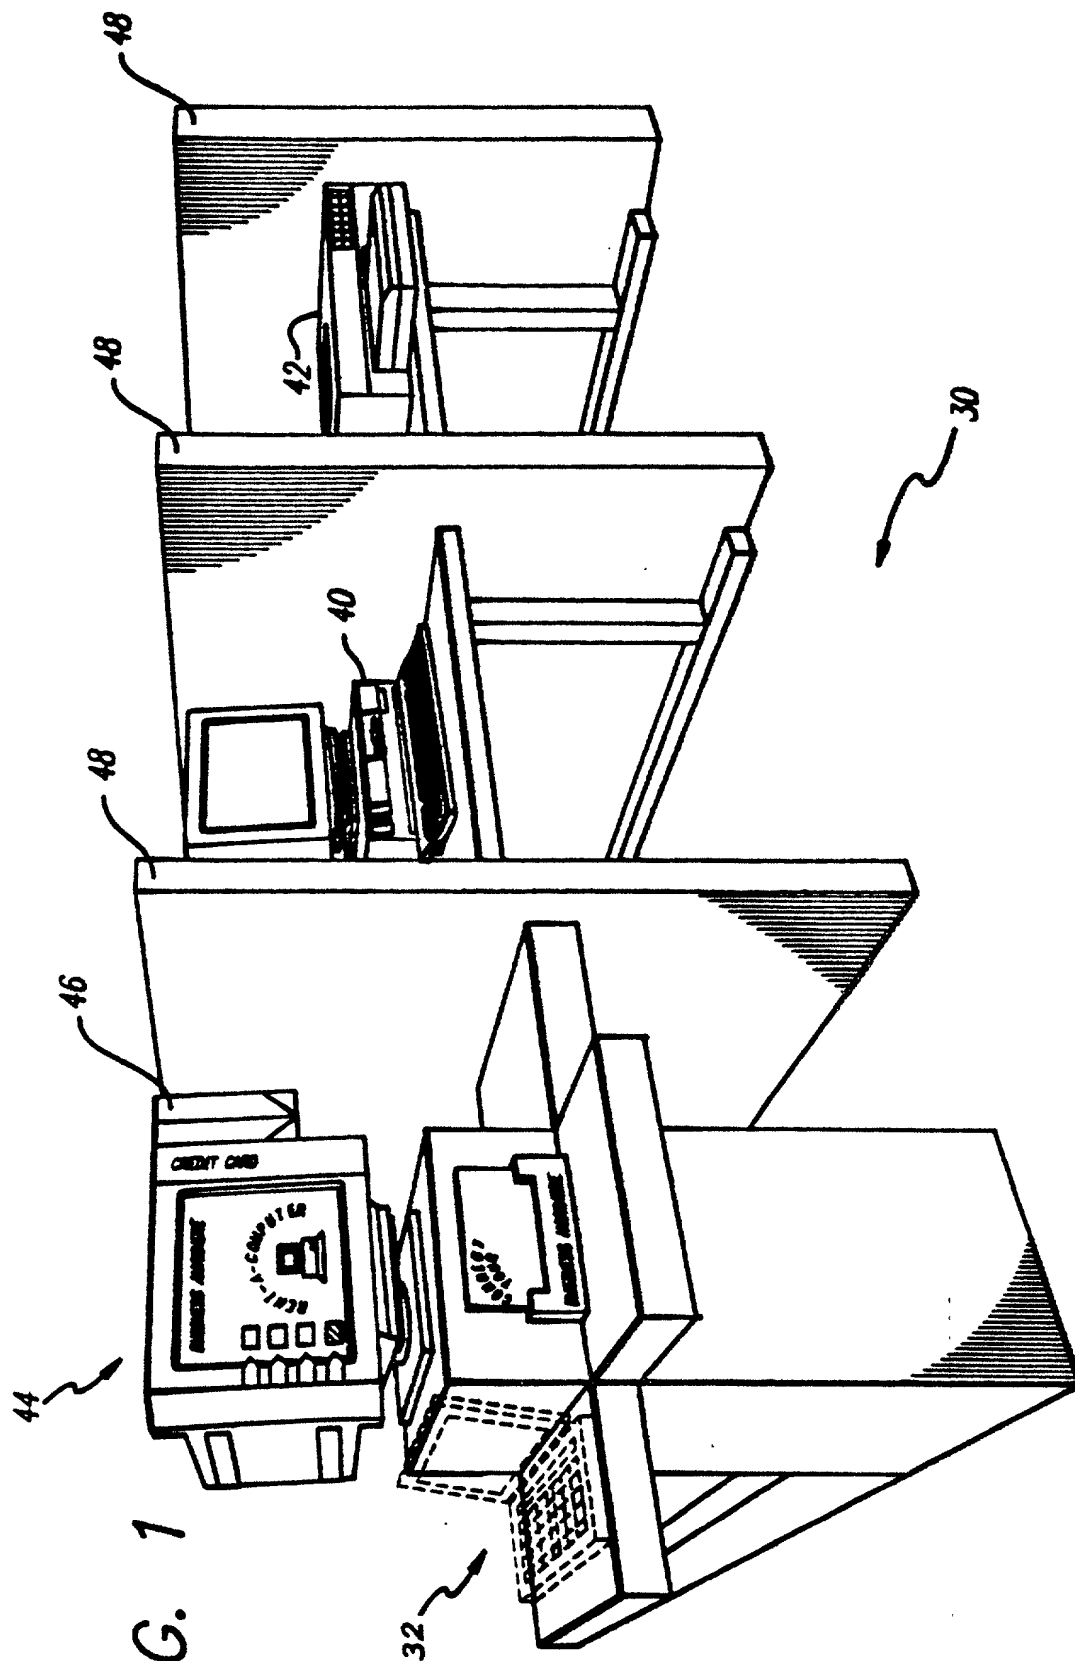
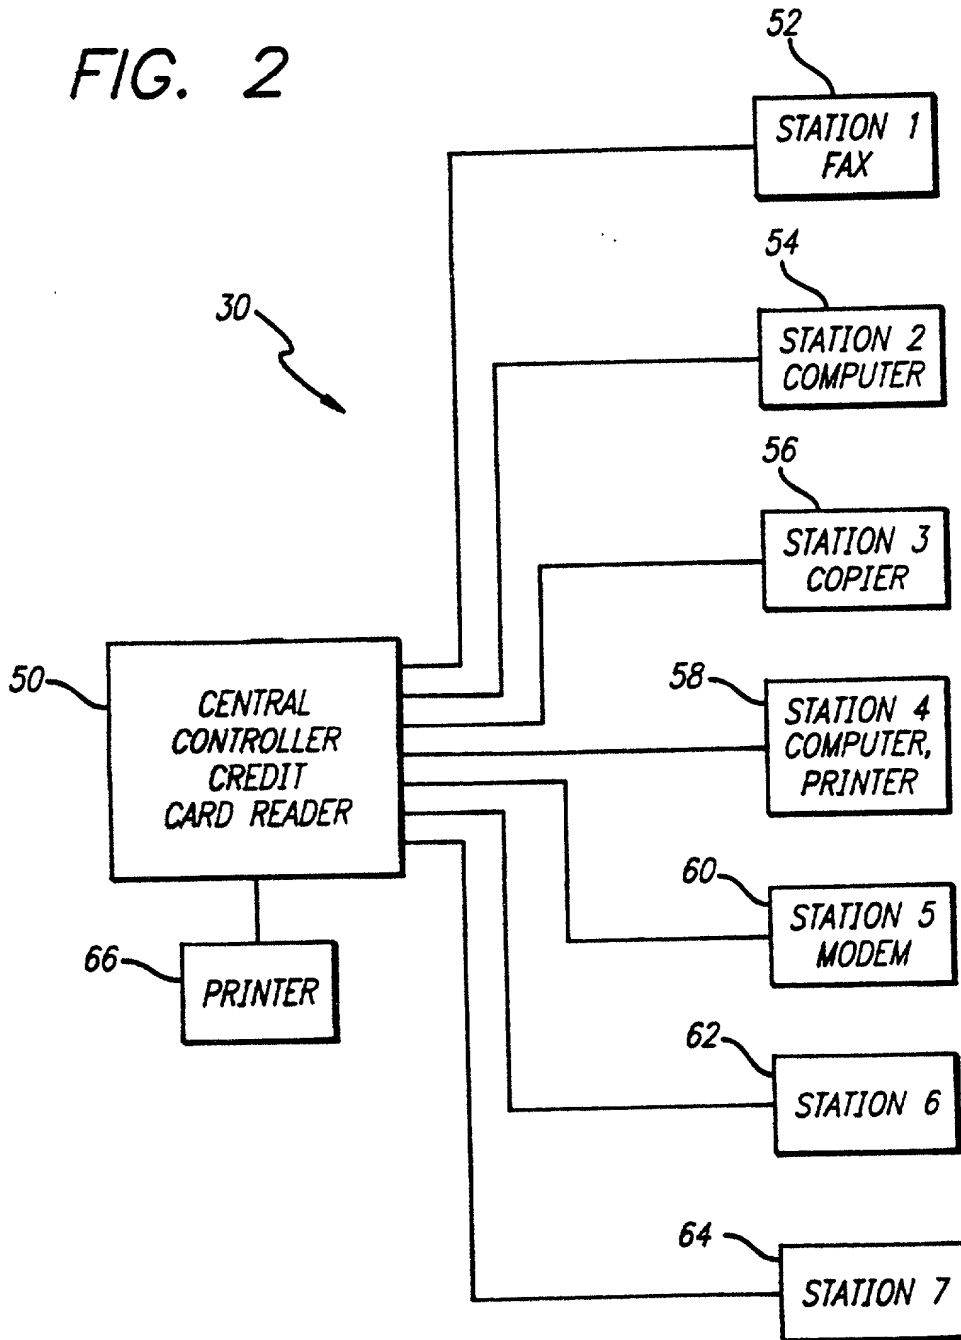
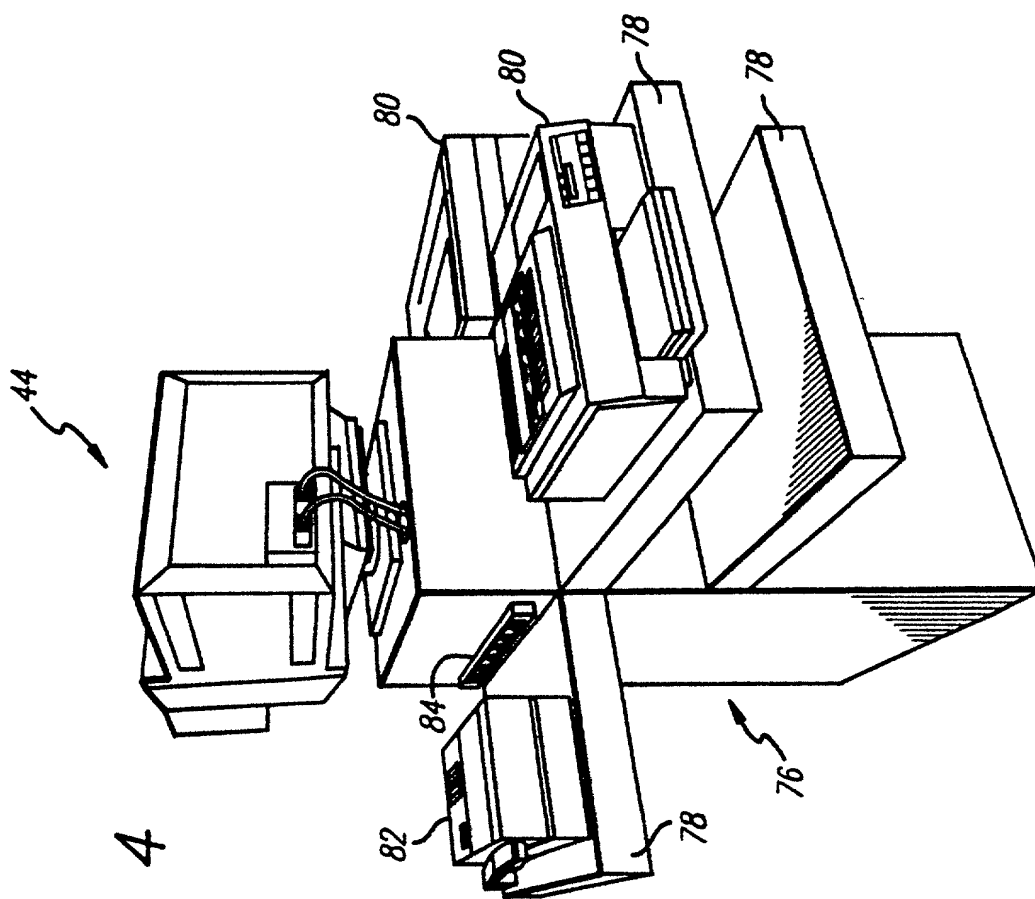
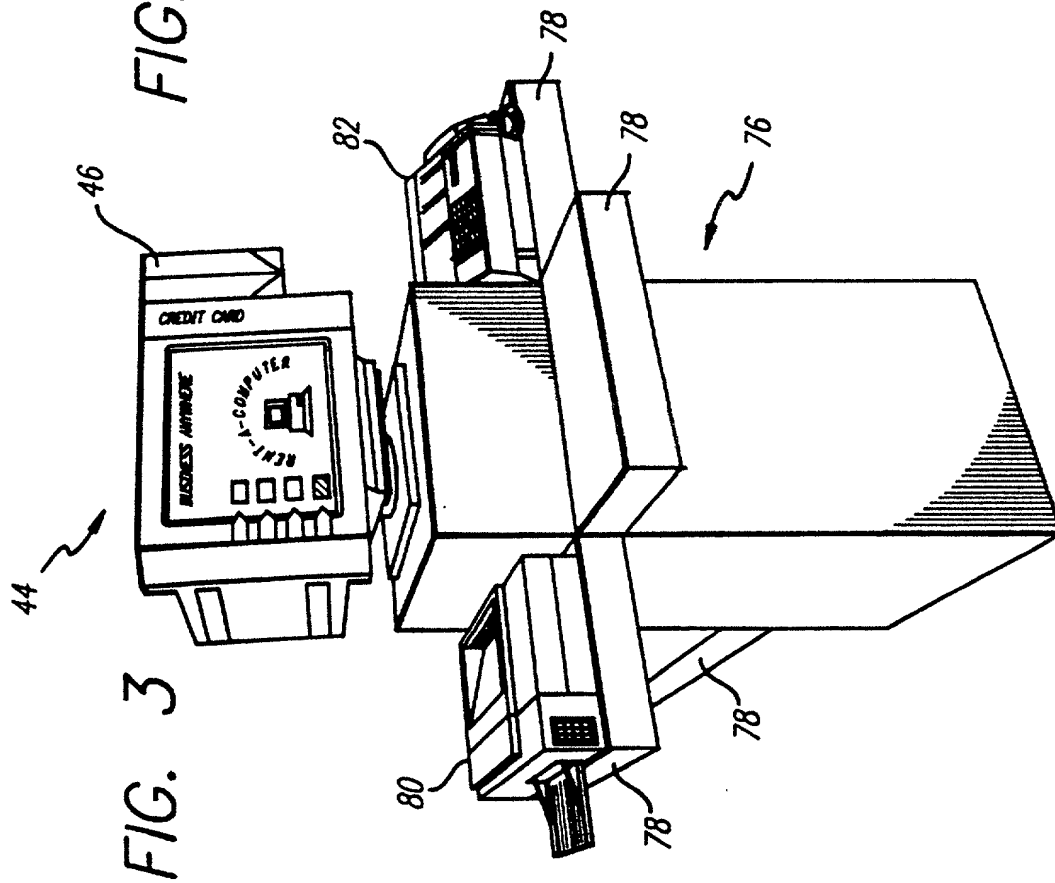


FIG. 1

FIG. 2






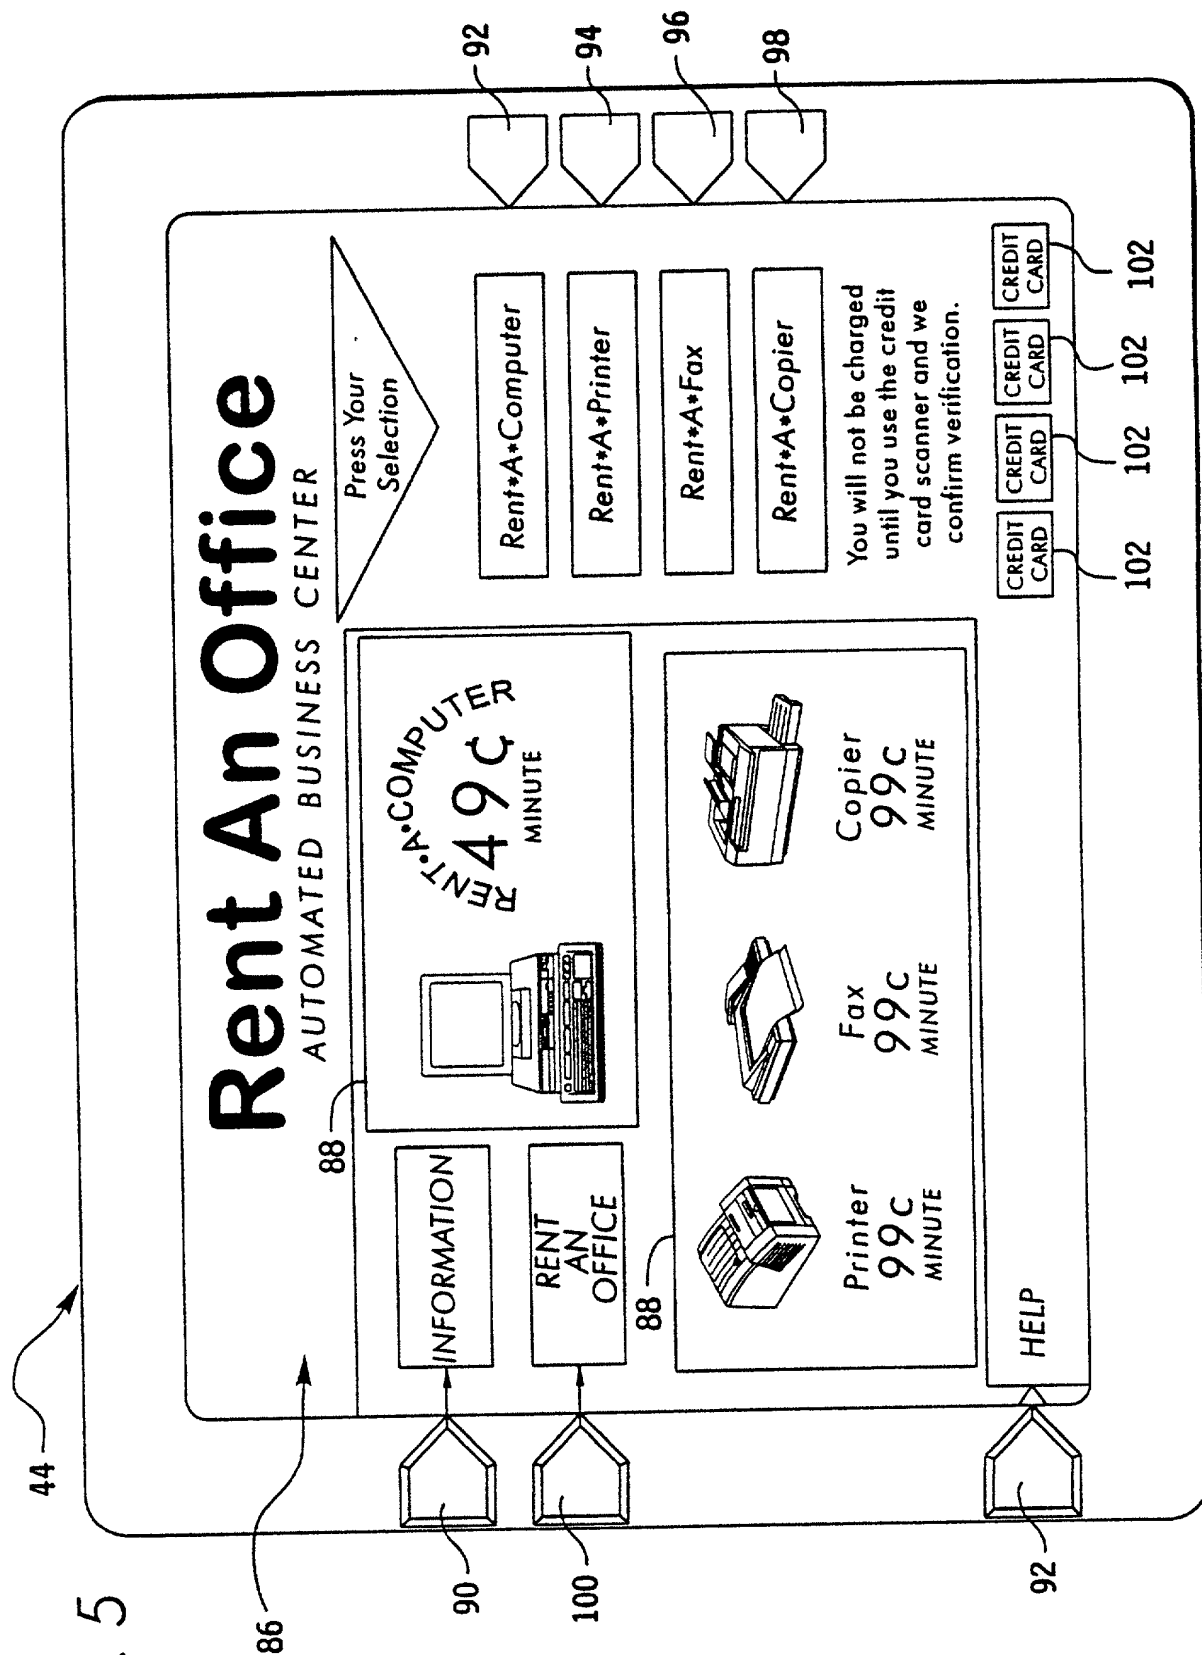


FIG. 6A

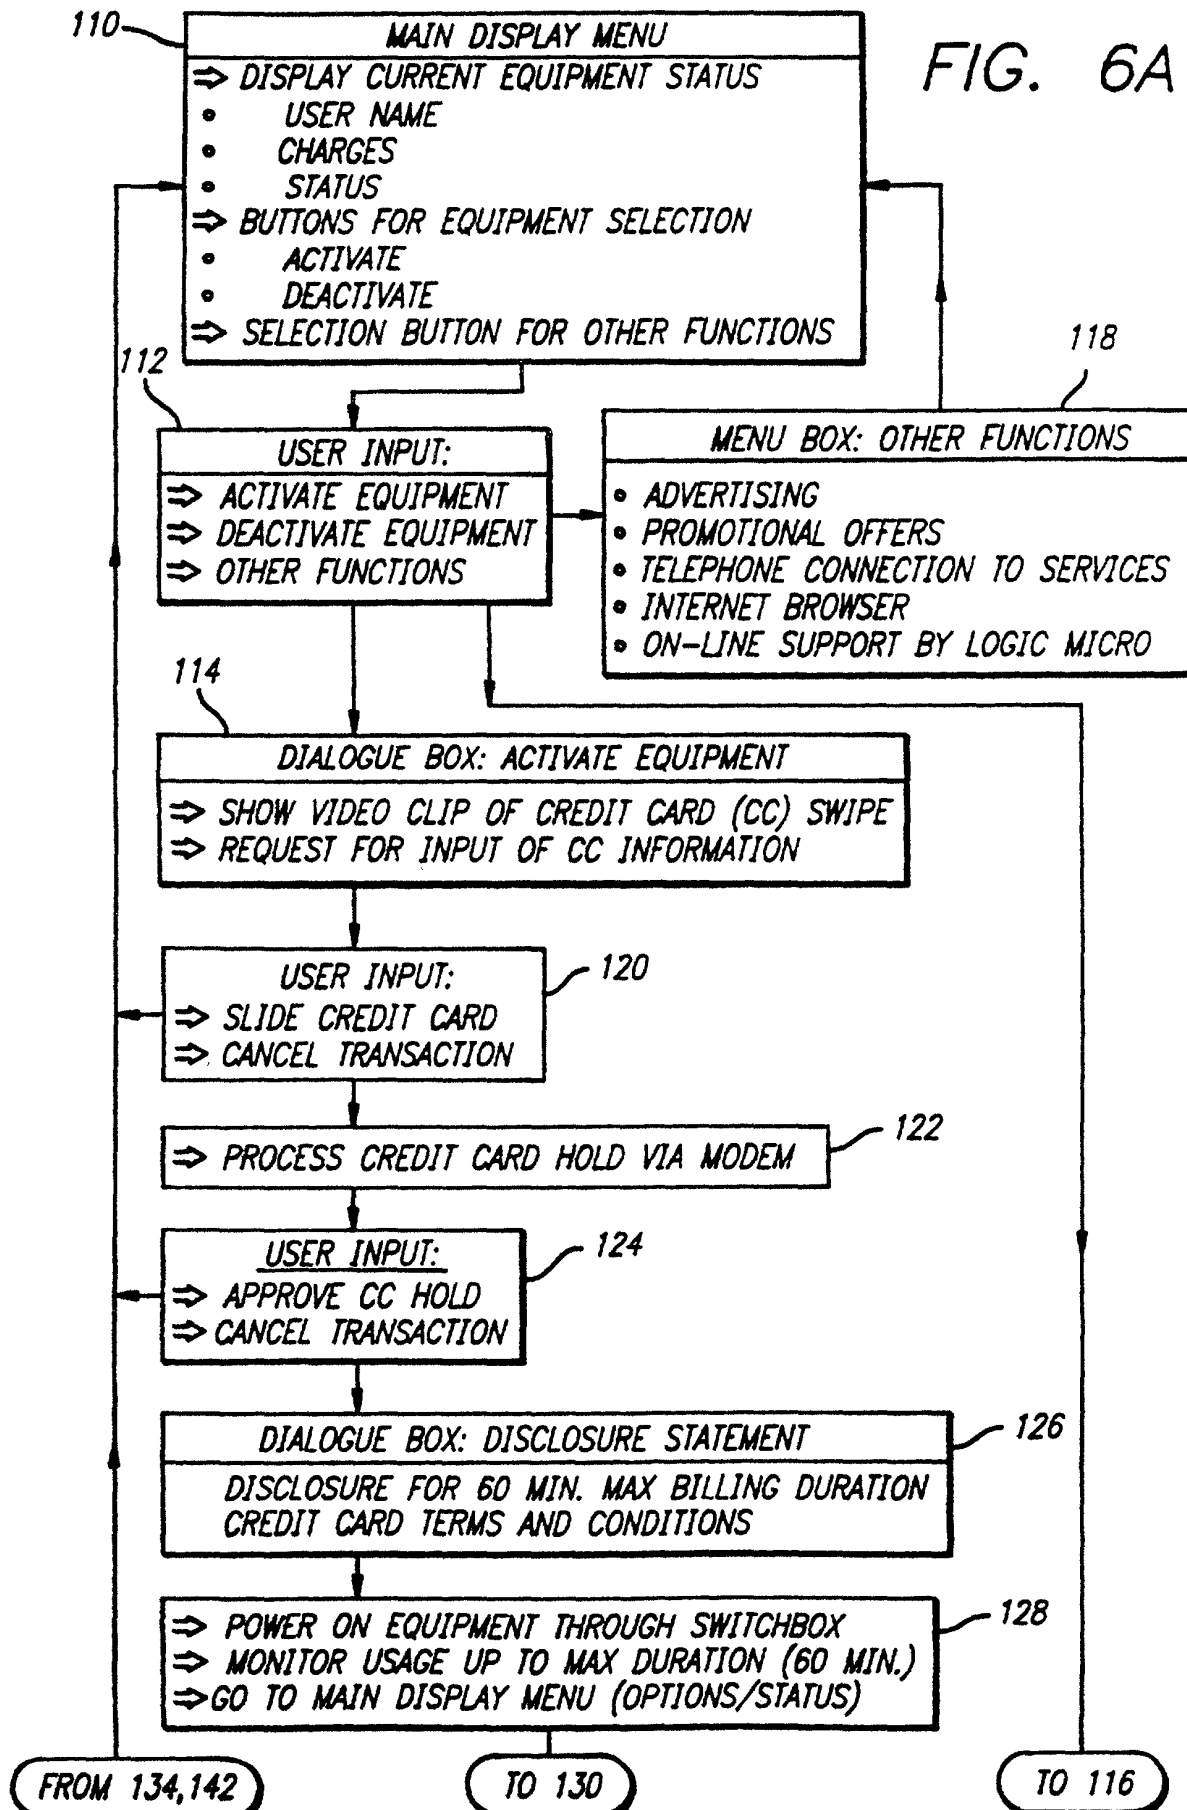

TO 110

FROM 128

FIG. 6B

FROM 112

116

DIALOGUE BOX DEACTIVATE EQUIPMENT

- ⇒ DISPLAY UPDATED CHARGES
- ⇒ ASK TO CONFIRM DEACTIVATION

136

USER INPUT:

- ⇒ CONFIRM DEACTIVATION
- ⇒ CANCEL AND CONTINUE USAGE

138

DIALOGUE BOX: PRINTING OF RECEIPT OPTIONS

- ◆ REQUEST PRINTING OF RECEIPT W/CC ACCOUNT
- ◆ REQUEST PRINTING OF RECEIPT WO/CC ACCOUNT
- ◆ REQUEST NO PRINTING OF RECEIPT

140

USER INPUT:

SELECT PRINTING OF RECEIPT

142

- ⇒ PRINT RECEIPT PER USER INPUT.
- ⇒ POWER OFF TO EQUIPMENT VIA SWITCHBOX.

130

DIALOGUE BOX: MAX DURATION EXCEEDED

- ⇒ DISPLAY WARNING OF MAXIMUM DURATION EXCEEDED
- ⇒ DISPLAY OPTION TO CONTINUE USAGE.

USER INPUT:


- CONTINUE USAGE
- DEACTIVATE EQUIPMENT
- NO RESPONSE

132

- ⇒ IF NO RESPONSE, POWER OFF TO EQUIPMENT
- ⇒ PRINT RECEIPT WO/CC ACCOUNT INFORMATION.

134

FIG. 7A

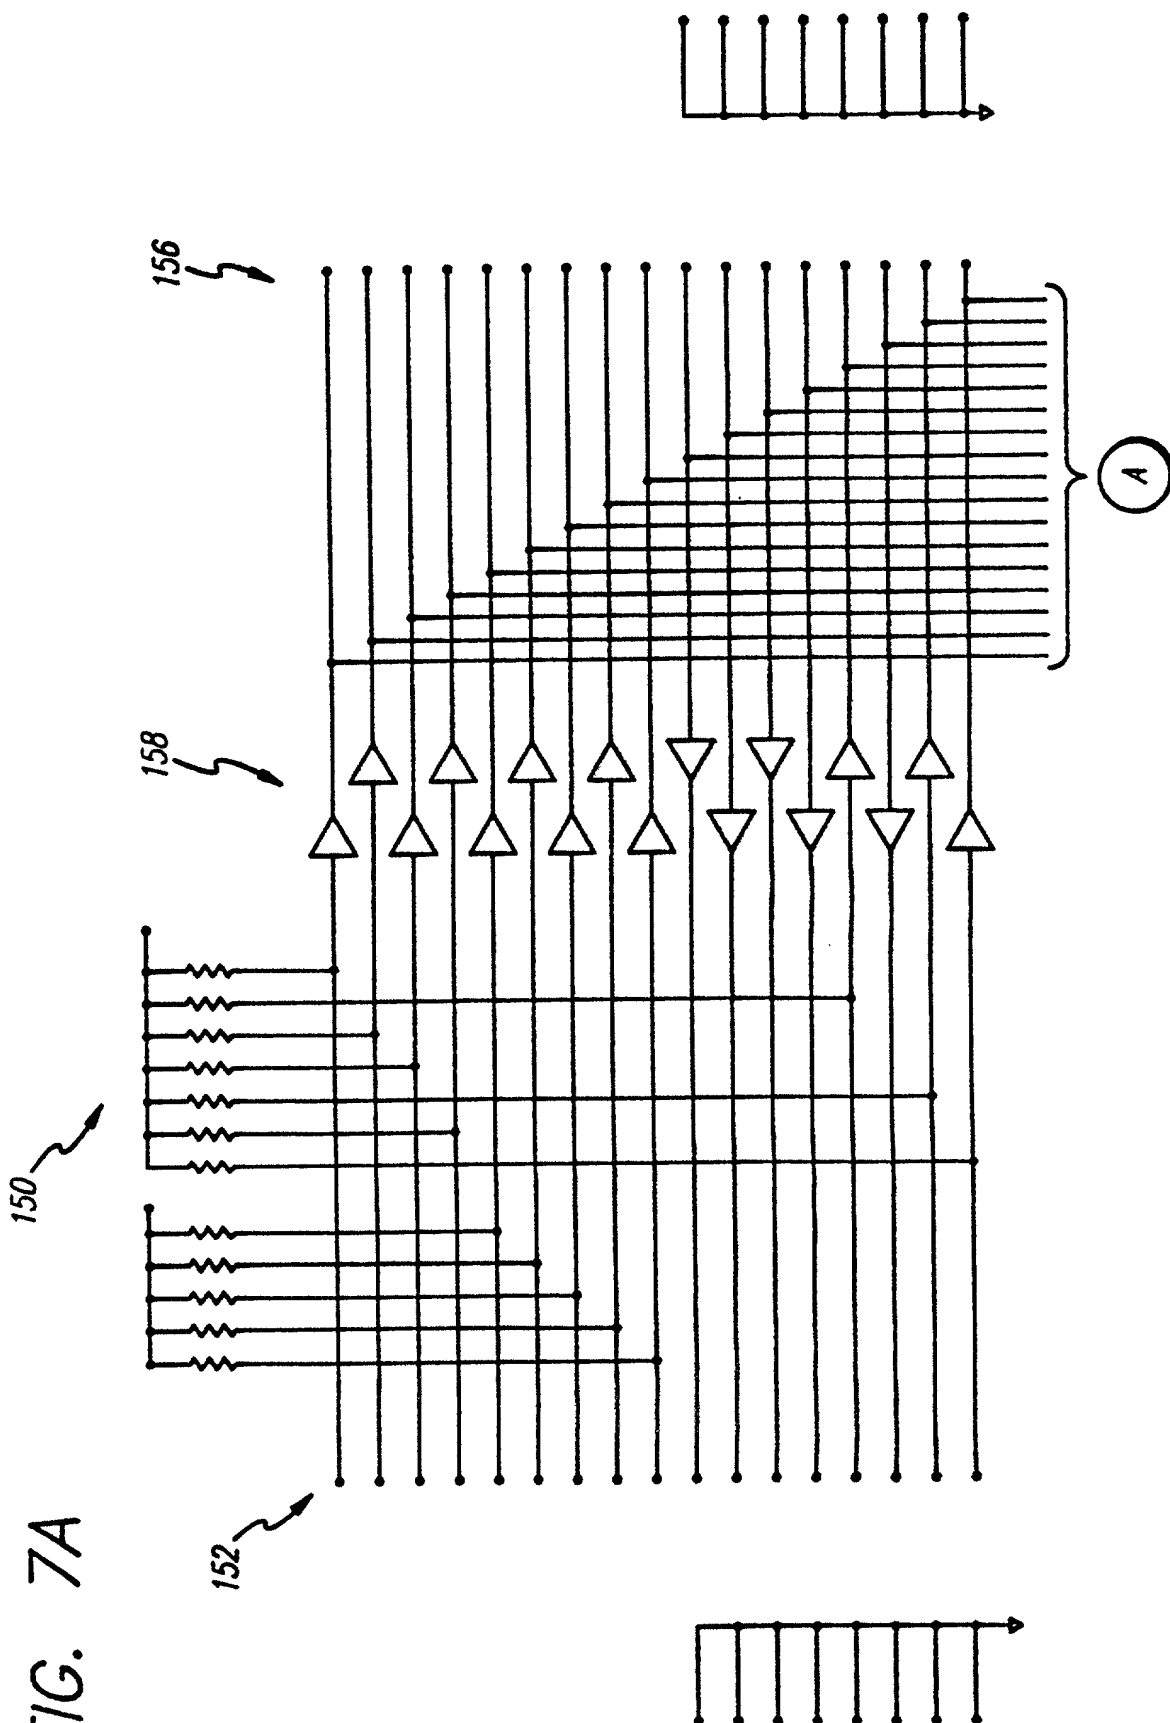

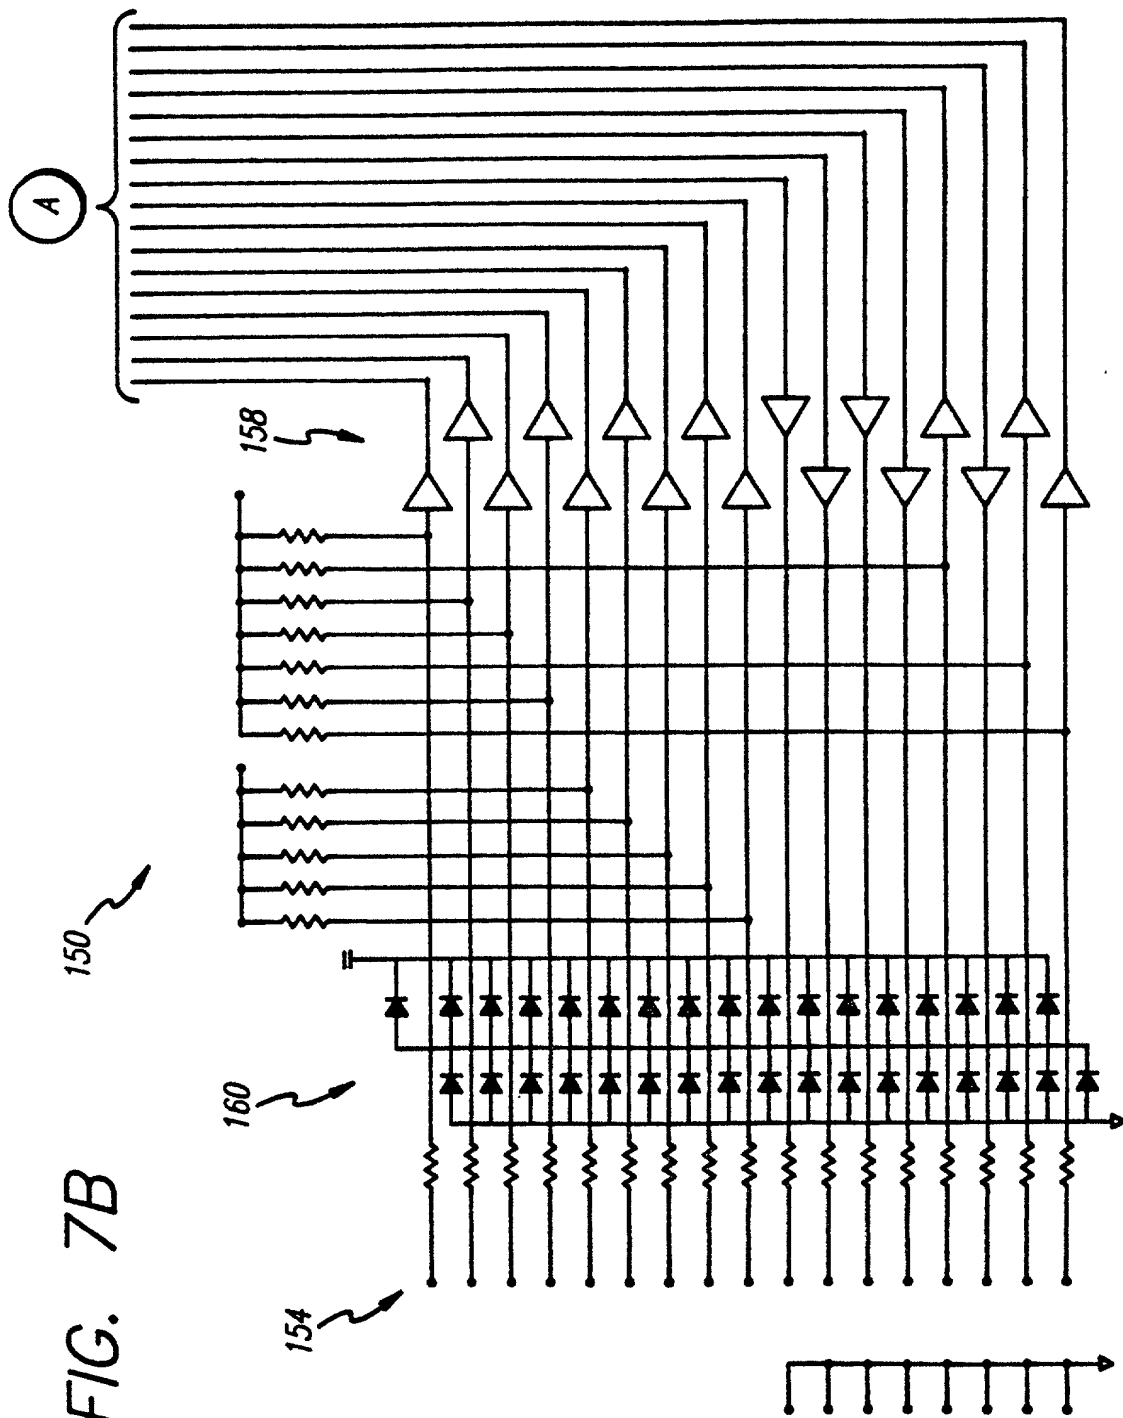


FIG. 8



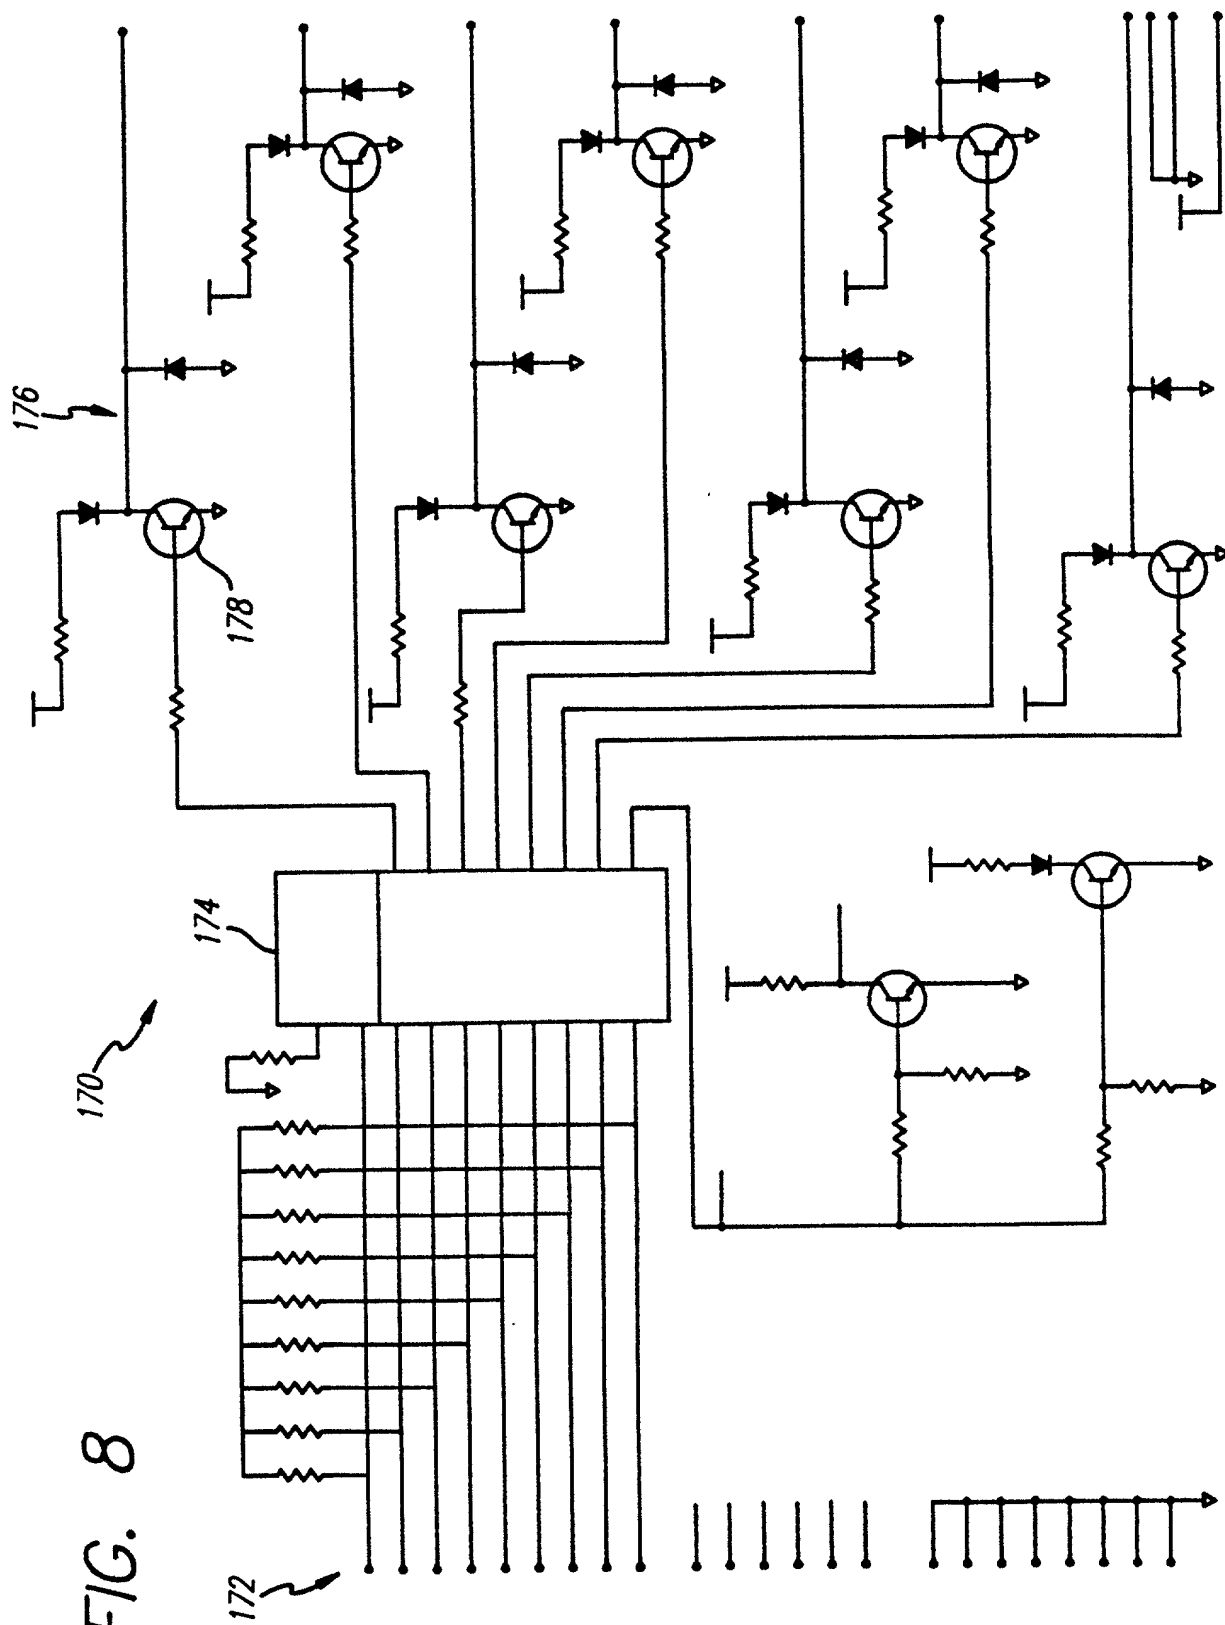


FIG. 9

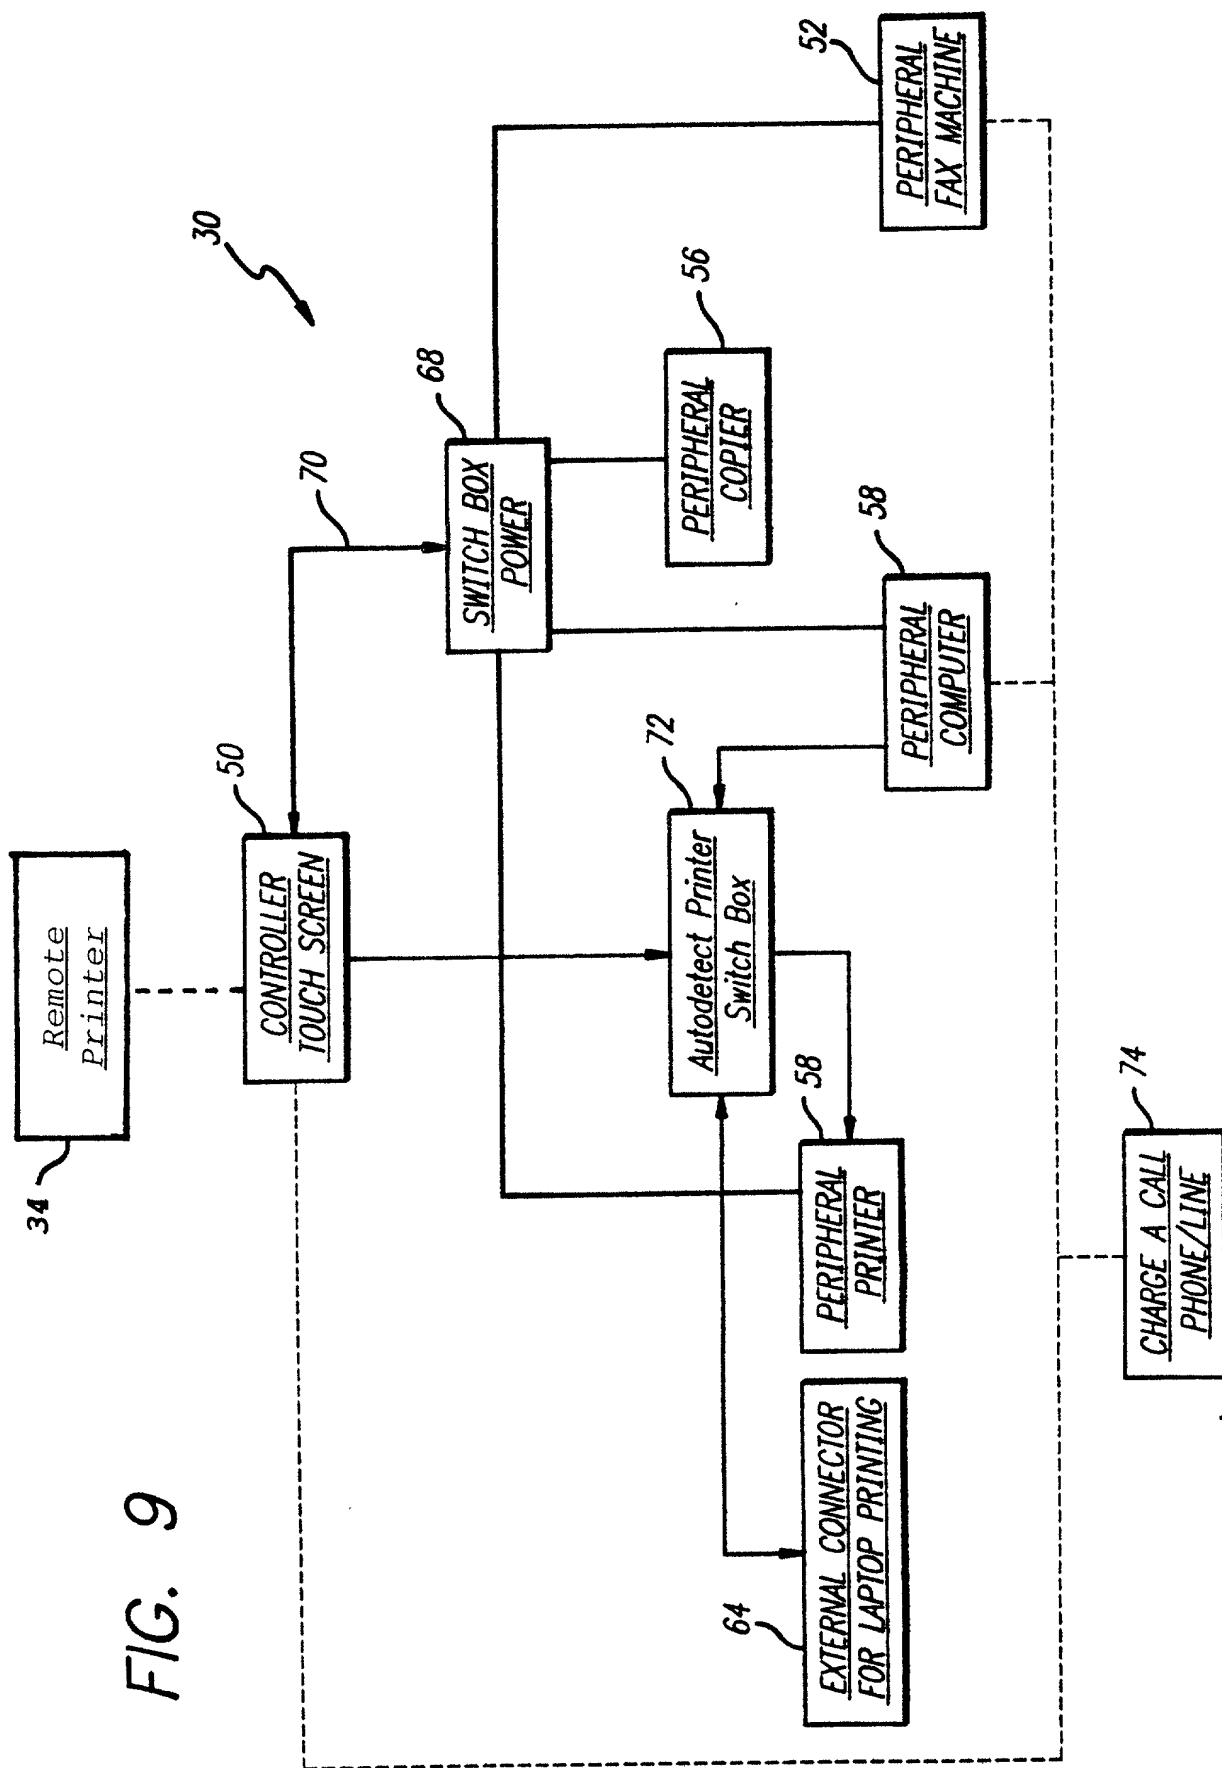

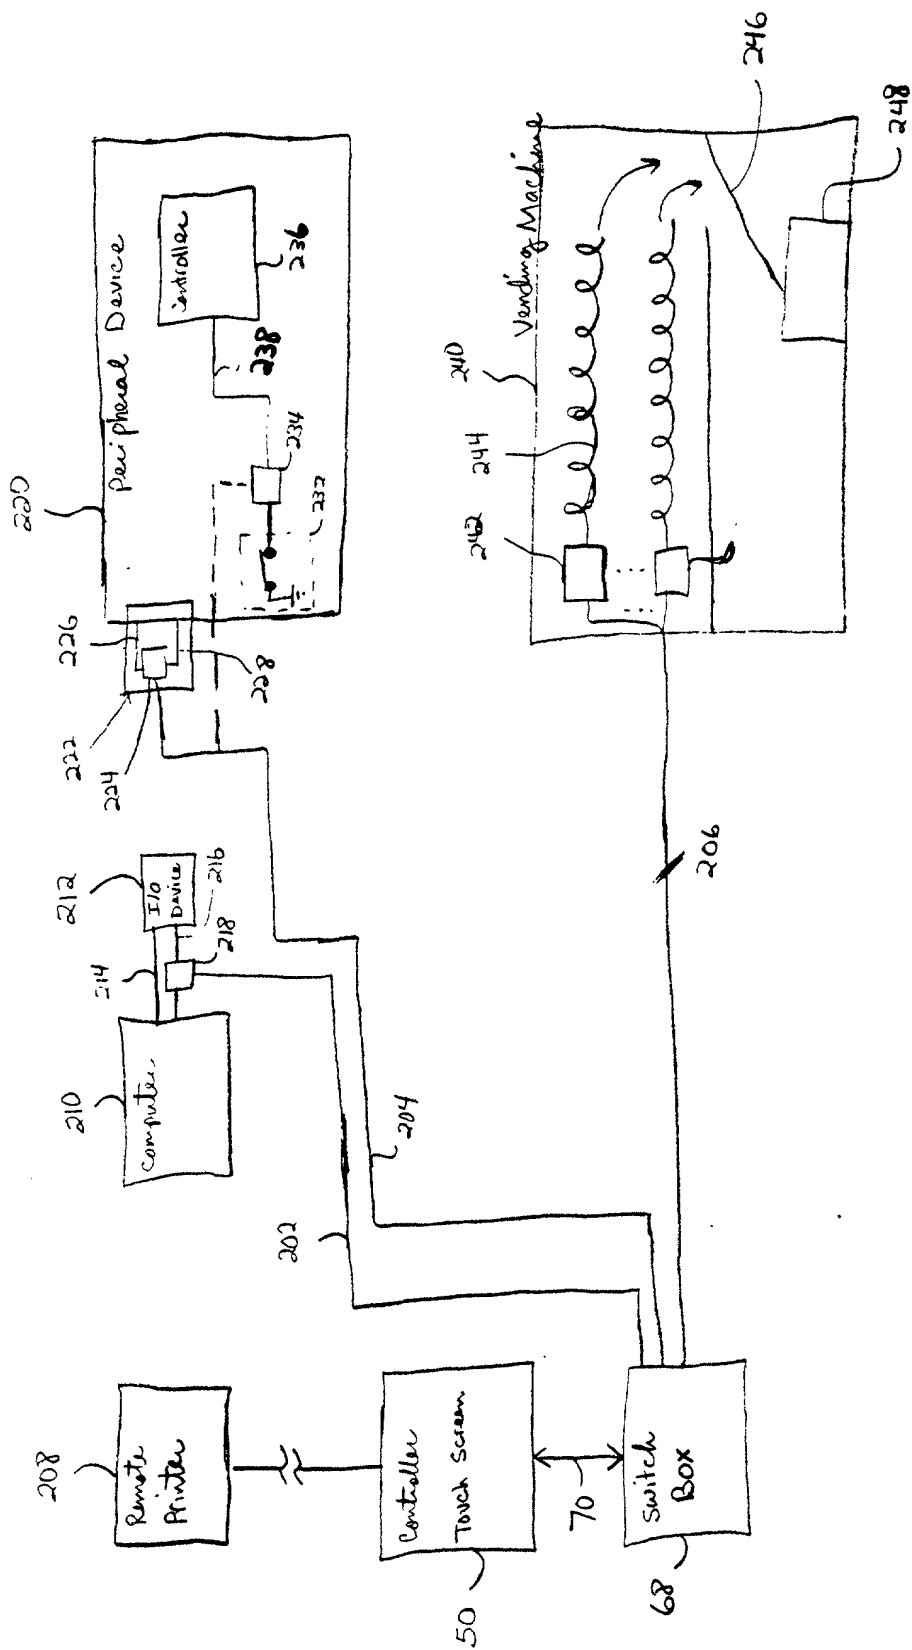

200

Figure 1D


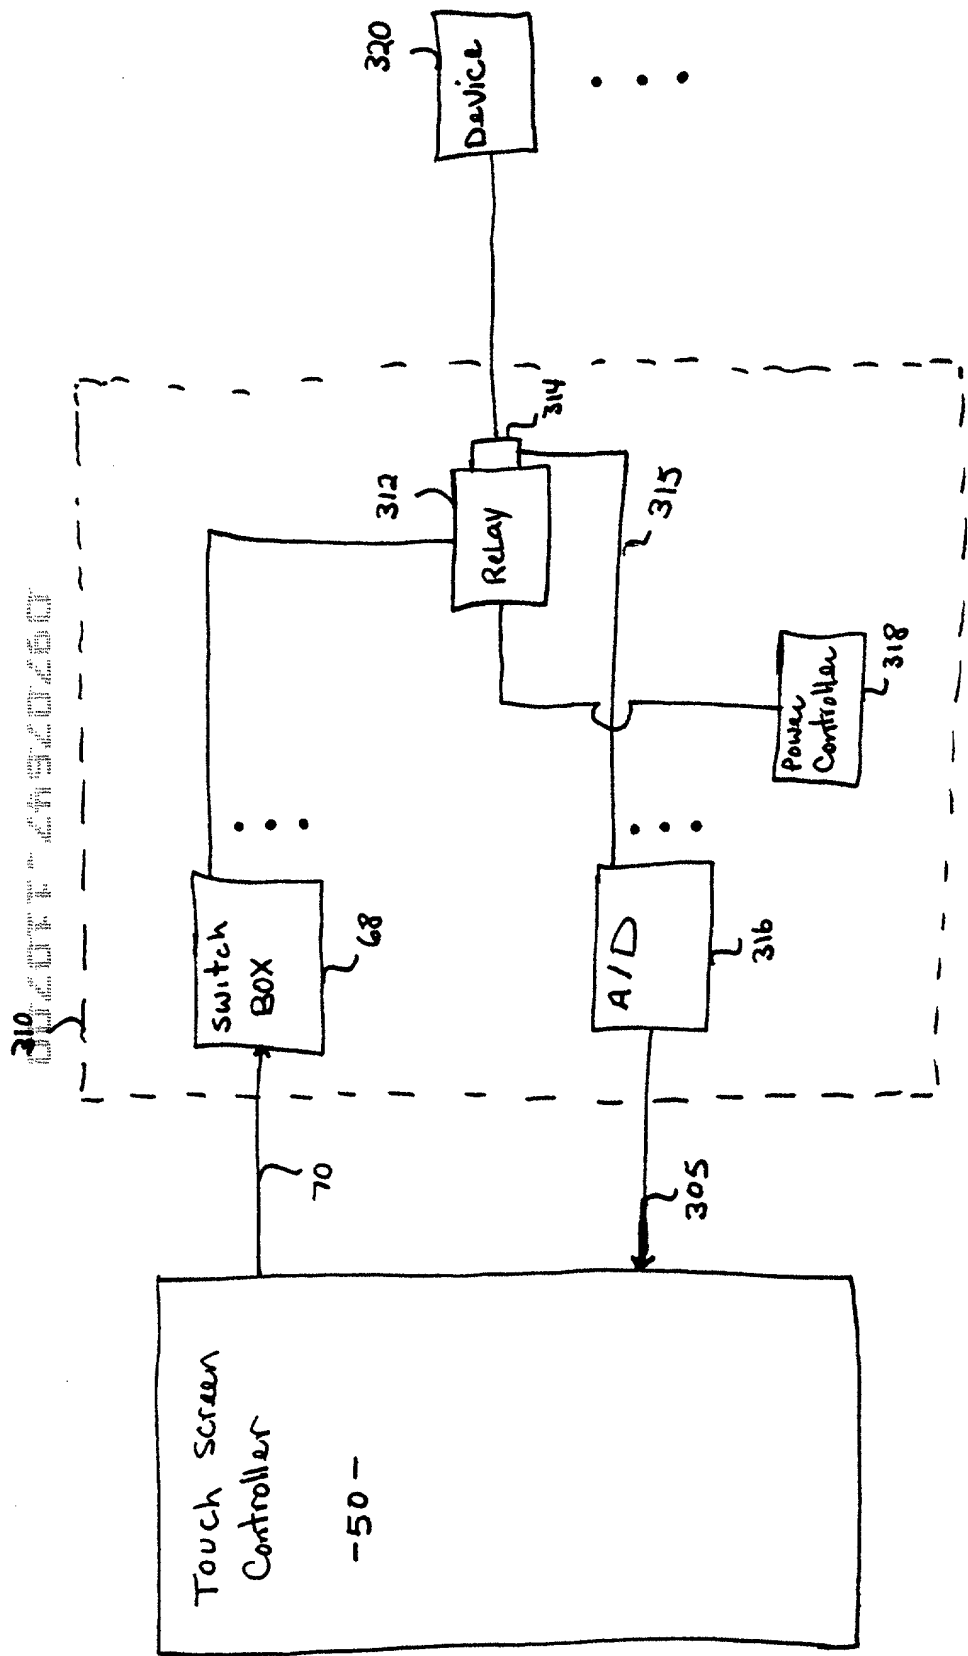



Figure 11

300

00000000 24920000

FIGURE 12

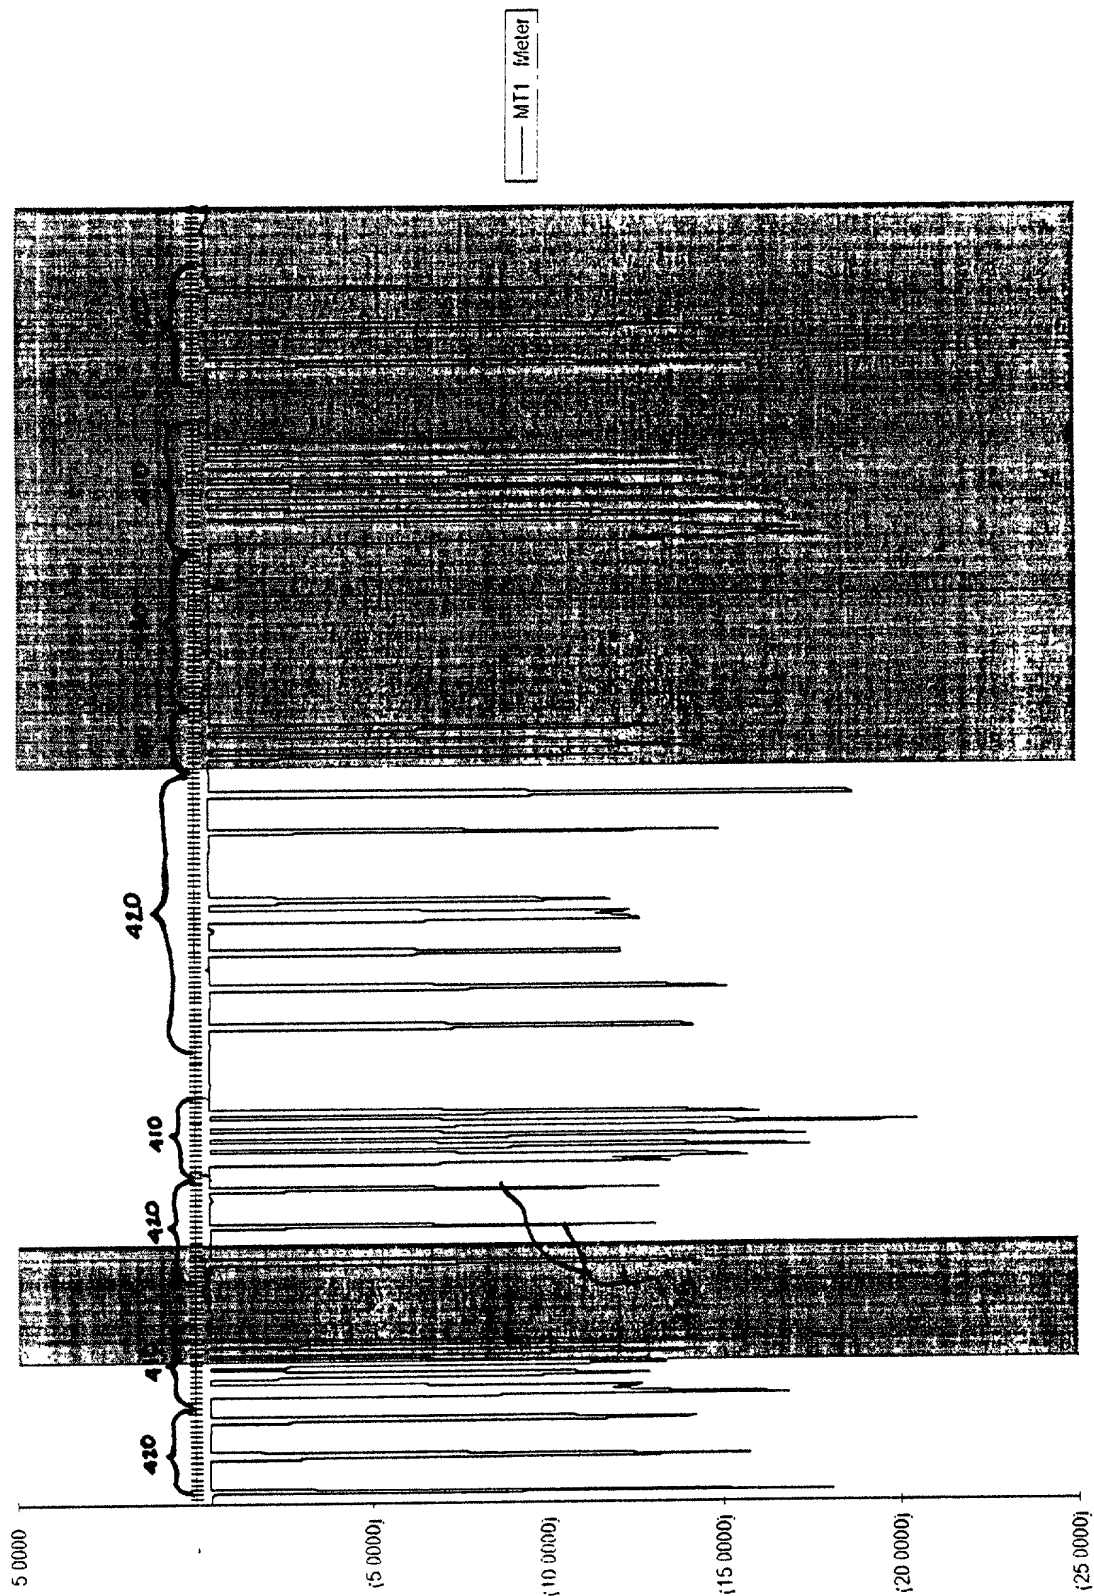

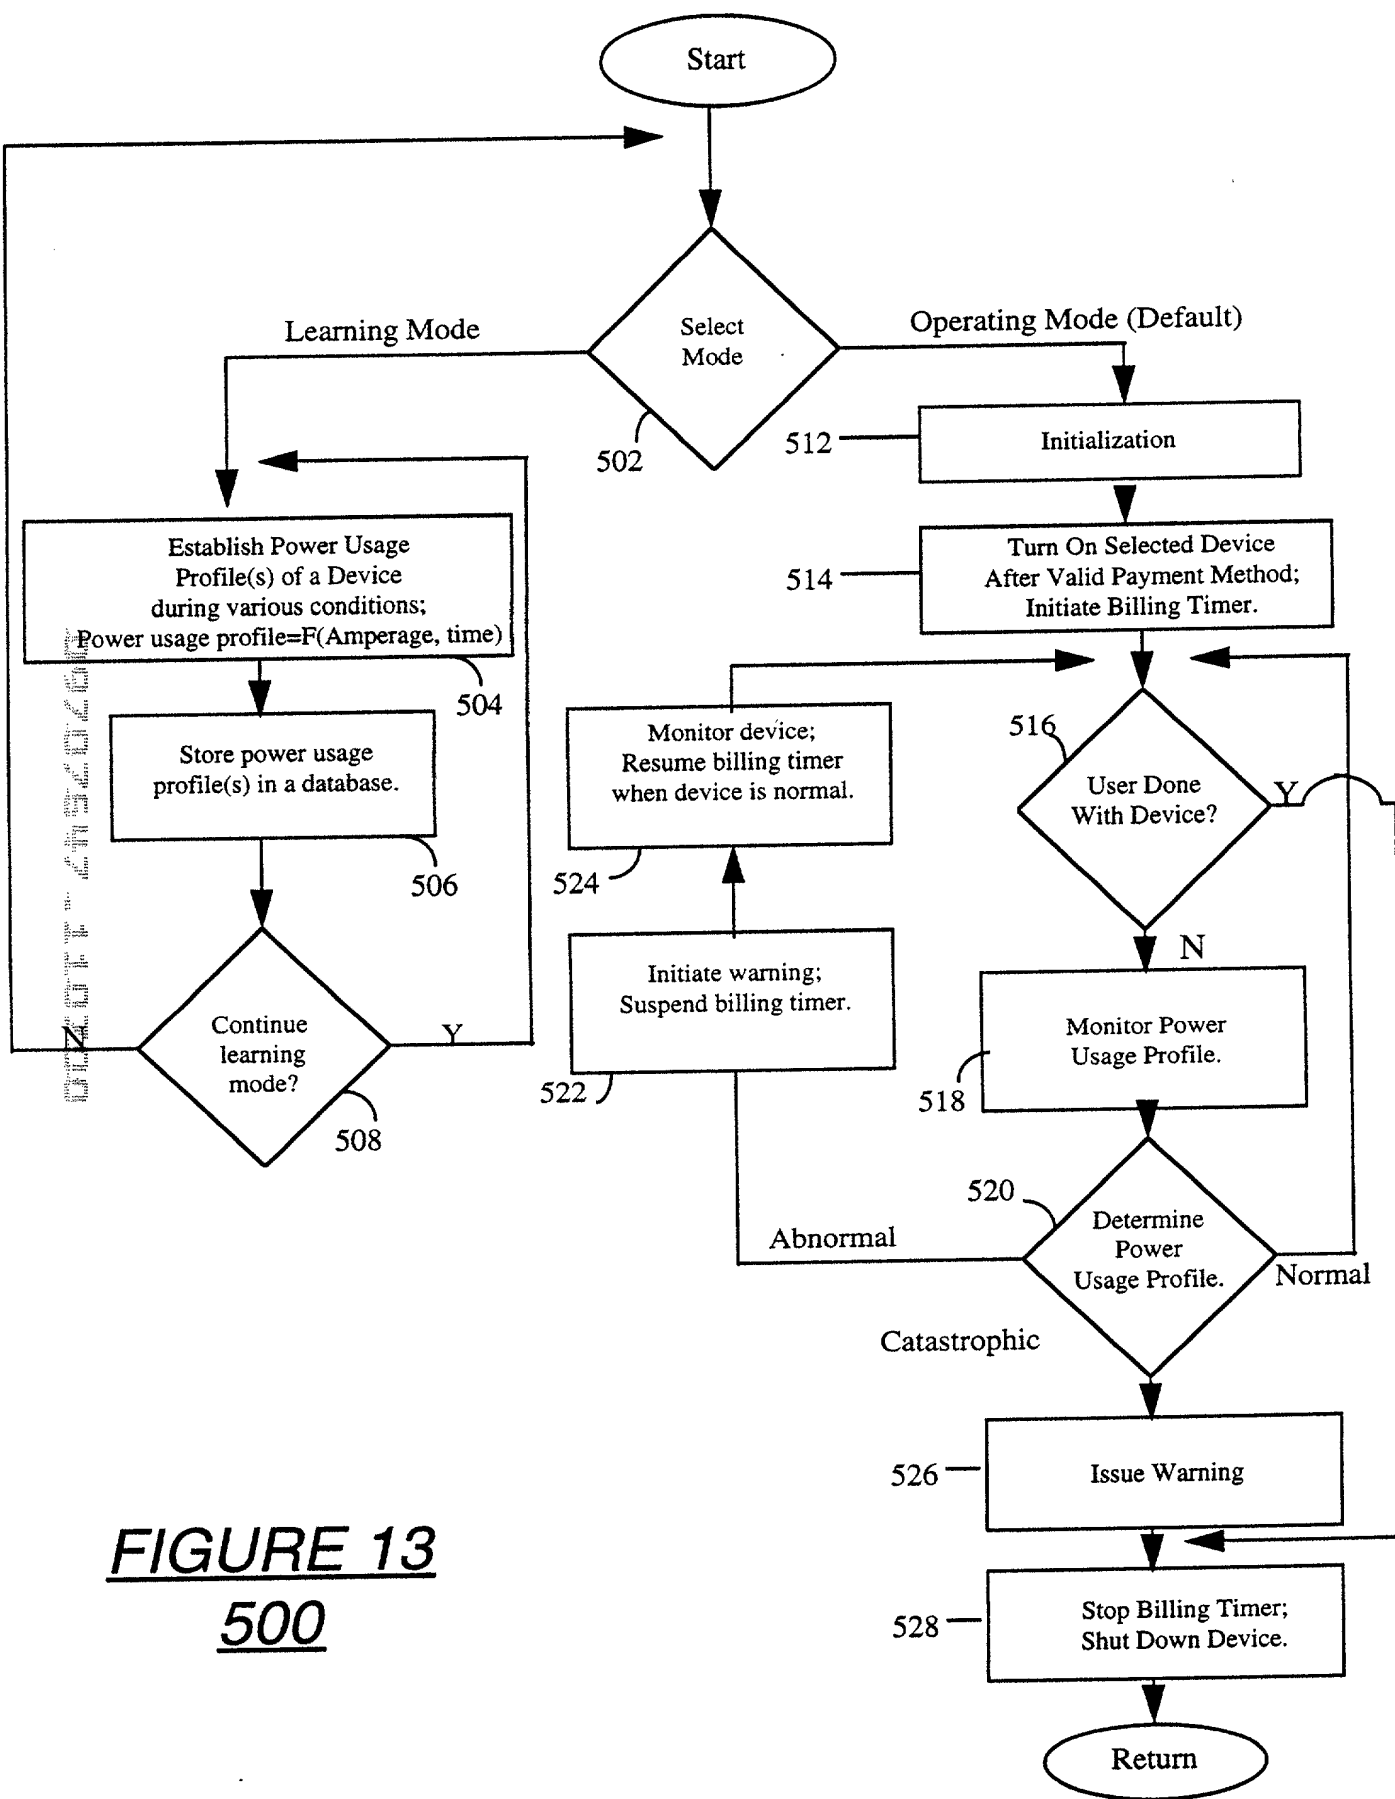

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or any original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR SELECTING, MONITORING, AND CONTROLLING ELECTRICALLY POWERED DEVICES

the specification of which ☒ is attached hereto.
☐ was filed on _____ as
United States Application Number _____
or PCT International Application Number _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

APPLICATION NUMBER	COUNTRY (OR INDICATE IF PCT)	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 37 USC 119
			<input type="checkbox"/> No <input type="checkbox"/> Yes
			<input type="checkbox"/> No <input type="checkbox"/> Yes
			<input type="checkbox"/> No <input type="checkbox"/> Yes

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below:

APPLICATION NUMBER	FILING DATE

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION NUMBER	FILING DATE	STATUS (ISSUED, PENDING, ABANDONED)
08/749,905	11/15/96	pending

I hereby appoint BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN, LLP, a firm including: Aloysius T. C. AuYeung, Reg. No. 35,432; William Thomas Babbitt, Reg. No. 39,591; Jordan Michael Becker, Reg. No. 39,602; Bradley J. Berezna, Reg. No. 33,474; Michael A. Bernadicou, Reg. No. 35,934; Roger W. Blakely, Jr., Reg. No. 25,831; Gregory D. Caldwell, Reg. No. 39,926; Kent M. Chen, Reg. No. 39,630; Lawrence M. Cho, Reg. No. 39,942; Thomas M. Coester, Reg. No. 39,637; Roland B. Cortes, Reg. No. 39,152; William Donald Davis, Reg. No. 38,428; Michael Anthony DeSanctis, Reg. No. 39,957; Daniel M. De Vos, Reg. No. 37,813; Tarek N. Fahmi, Reg. No. 41,402; James Y. Go, Reg. No. 40,621; Sharmini Nathan Green, Reg. No. 41,410; David R. Halvorson, Reg. No. 33,395; Eric Ho, Reg. No. 39,711; Phuong-Quan Hoang, Reg. No. P-41,839; George W Hoover II, Reg. No. 32,992; Eric S. Hyman, Reg. No. 30,139; Dag H. Johansen, Reg. No. 36,172; Stephen L. King, Reg. No. 19,180; Michael J. Mallie, Reg. No. 36,591; Thinh V. Nguyen, Reg. No. P-42,034; Kimberley G. Nobles, Reg. No. 38,255; Ronald W. Reagin, Reg. No. 20,340; Babak Redjaian, Reg. No. P-42,096; James H. Salter, Reg. No. 35,668; William W. Schaal, Reg. No. 39,018; James C. Scheller, Reg. No. 31,195; Charles E. Shemwell, Reg. No. 40,171; Maria McCormack Sobrino, Reg. No. 31,639; Stanley W. Sokoloff, Reg. No. 25,128; Allan T. Sponseller, Reg. No. 38,318; Steven R. Sponseller, Reg. No. 39,384; Judith A. Szepesi, Reg. No. 39,393; Edwin H. Taylor, Reg. No. 25,129; George G. C. Tseng, Reg. No. 41,355; Lester J. Vincent, Reg. No. 31,460; John Patrick Ward, Reg. No. 40,216; Ben J. Yorks, Reg. No. 33,609; and Norman Zafman, Reg. No. 26,250; my attorneys; and Robert Andrew Diehl, Reg. No. 40,992; Thomas A. Hassing, Reg. No. 36,159; and Edwin A. Sloane, Reg. No. 34,728; my patent agents, with offices located at 12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025, telephone (714) 557-3800, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor (given name, family name) Kim Y. Kao

Inventor's Signature  **Date** 5/28/98

Residence Tustin, California **Citizenship** United States
(City, State) (Country)

P. O. Address 2410 N. Bennett

Tustin, California 92782 United States

Full Name of Second/Joint Inventor (given name, family name) Bruce K. Sauer

Inventor's Signature [Signature] Date 5-28-98

Residence Fountain Valley, California Citizenship United States
(City, State) (Country)

P. O. Address 10849 Golden Eye
Fountain Valley, California 92708 United States

Full Name of Third/Joint Inventor (given name, family name) Kent Kwan

Inventor's Signature [Signature] Date 5/28/98

Residence Irvine, California Citizenship United States
(City, State) (Country)

P. O. Address 949 Veneto
Irvine, California 92614 United States

Full Name of Fourth/Joint Inventor (given name, family name) _____

Inventor's Signature _____ Date _____

Residence _____ Citizenship _____
(City, State) (Country)

P. O. Address _____

Full Name of Fifth/Joint Inventor (given name, family name) _____

Inventor's Signature _____ Date _____

Residence _____ Citizenship _____
(City, State) (Country)

P. O. Address _____
